

IA12ESN04UC

Carlo Gavazzi Inductive Proximity Stainless Steel Short M12 DC
Namur NC Output 4mm Sense 2m



NON-CONTACT SENSORS



Component type	Inductive proximity switch
Range	Inductive Prox
Model	N/A
Alternative	CALL FOR ALTERNATIVE

The Carlo Gavazzi Inductive Proximity Sensors are a reliable and contactless solution in the detection of machinery and automation equipment. Available in a variety of styles and resistant to high level shock and vibration. Able to withstand wide temperature variations and voltage peaks of up to 200V making them ideal for high pressure and high temperature wash-down environments.

ELECTRICAL

Type of actuation	Metallic Target
Switching distance	4 mm
Voltage type	DC
Rated control supply voltage U_s at AC 50HZ	- V
Rated control supply voltage U_s at AC 60HZ	- V
Rated control supply voltage U_s at DC	9-7 V
Max. output current at protected output	9.35 mA
Type of switch function	Breaker contact
Type of switching output	NAMUR
Switching frequency	1200 Hz
Type of electric connection	Cable
Supply voltage	7-9 V
Number of protected semiconductor outputs	1

COMMUNICATION

Type of interface	None
Construction type housing	Cylinder, screw-thread
Material housing	Metal
IP rating	IP67
Coating housing	Nickel-plated
Cascadable	No
Compression-resistant	No
Suitable for safety functions	No

CONSTRUCTION

MECHANICAL

Mechanical mounting condition for sensor	Concise
--	---------

DIMENSIONS

Diameter sensor	12 mm
Length of sensor	30 mm

ENVIRONMENT

Storage temperature	-30...80 °C
---------------------	-------------

CERTIFICATES/APPROVALS

SIL according to IEC 61508	None
----------------------------	------

IA12ESN04UC

Carlo Gavazzi Inductive Proximity Stainless Steel Short M12 DC
Namur NC Output 4mm Sense 2m




NON-CONTACT SENSORS



CERTIFICATES/APPROVALS

Explosion safety category for gas	None
Explosion safety category for dust	None

DIMENSIONAL DIAGRAM

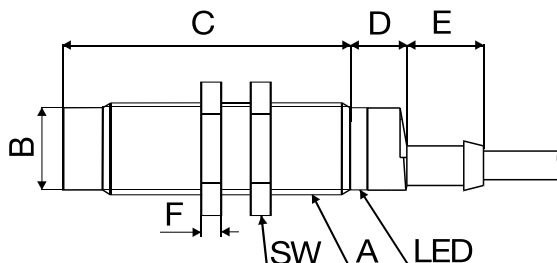

Type	A	B Ø mm	C mm	D mm	E mm	F mm	SW mm
IA 12 ESF 02 UC	M12 x 1 x 30	10.7	30	11	5.0	4	17
IA 12 ELF 02 UC	M12 x 1 x 50	10.7	50	11	5.0	4	17
IA 12 ESF 02 UC M1	M12 x 1 x 30	10.7	30	12.6	11.9	4	17
IA 12 ELF 02 UC M1	M12 x 1 x 50	10.7	50	12.6	11.9	4	17
IA 12 ESN 04 UC	M12 x 1 x 30	10.7	34	11	5.0	4	17
IA 12 ELN 04 UC	M12 x 1 x 50	10.7	54	11	5.0	4	17
IA 12 ESN 04 UC M1	M12 x 1 x 30	10.7	34	12.6	11.9	4	17
IA 12 ELN 04 UC M1	M12 x 1 x 50	10.7	54	12.6	11.9	4	17
IA 18 ESF 05 UC	M18 x 1 x 30	16.7	30	11.6	15.4	4	24
IA 18 ELF 05 UC	M18 x 1 x 50	16.7	50	11.6	15.4	4	24
IA 18 ESF 05 UC M1	M18 x 1 x 30	16.7	30	13.1	11.9	4	24
IA 18 ELF 05 UC M1	M18 x 1 x 50	16.7	50	13.1	11.9	4	24
IA 18 ESN 08 UC	M18 x 1 x 30	16.7	38	11.6	15.4	4	24
IA 18 ELN 08 UC	M18 x 1 x 50	16.7	58	11.6	15.4	4	24
IA 18 ESN 08 UC M1	M18 x 1 x 30	16.7	38	13.1	11.9	4	24
IA 18 ELN 08 UC M1	M18 x 1 x 50	16.7	58	13.1	11.9	4	24
IA 30 ESF 10 UC	M30 x 1.5 x 30	28	30	13.6	15.4	5	36
IA 30 ELF 10 UC	M30 x 1.5 x 50	28	50	13.6	15.4	5	36
IA 30 ESF 10 UC M1	M30 x 1.5 x 30	28	30	13.6	11.9	5	36
IA 30 ELF 10 UC M1	M30 x 1.5 x 50	28	50	13.6	11.9	5	36
IA 30 ESN 15 UC	M30 x 1.5 x 30	28	42	13.6	15.4	5	36
IA 30 ELN 15 UC	M30 x 1.5 x 50	28	62	13.6	15.4	5	36
IA 30 ESN 15 UC M1	M30 x 1.5 x 30	28	42	13.6	11.9	5	36
IA 30 ELN 15 UC M1	M30 x 1.5 x 50	28	62	13.6	11.9	5	36