# ISO332PGS

**Socomec ISO Enclosed Isolator, IP 65 Plastic Grey, Handle - Blue, 3P 32A**

ENCLOSED ISOLATORS




| | |
|---|---|
| **Component type** | Switch disconnector |
| **Range** | ISO |
| **Model** | N/A |
| **Product status** | Existing |

The Socomec ISO enclosed isolators deliver IP65, wall mountable, switching solutions ensuring coverage for any application. With a choice of plastic, aluminium and 316 stainless steel enclosures ranging from 25A to 250A, the range suits all environments. All handles allow for up to 3 padlocks in the OFF position and enclosure interlocking when in the ON position.

| | | |
|---|---|---|
| **ELECTRICAL** | Rated uninterrupted current Iu | 32 A |
| | Number of poles | 3 |
| | Frequency | 50/60 Hz |
| | Rated operation current Ie at AC-23a, 690 V | 13 A |
| | Rated short-time withstand current Icw | 1.28 kA |
| | Rated insulation voltage Ui | 690 V |
| | Rated impulse withstand voltage Uimp | 6 kV |
| | Type of electrical connection of main circuit | Screw connection |
| | Rated operating voltage | 690 V |
| | Conditioned rated short-circuit current Iq | 1.28 kA |
| | Number of auxiliary contacts as normally closed contact | 0 |
| | Number of auxiliary contacts as normally open contact | 0 |
| | Number of auxiliary contacts as change-over contact | 0 |
| | Motor drive integrated | No |
| **CONSTRUCTION** | Material housing | Plastic |
| | Colour control element | Other |
| | Degree of protection (IP), front side | IP65 |
| | Degree of protection (NEMA) | 4X |
| | Version as reversing switch | No |
| | Number of switches | 1 |
| | Interlockable | No |
| **MECHANICAL** | Padlock locking | Yes |
| **DIMENSIONS** | Height | 140 mm |
| | Width | 100 mm |



Published on 02 November 2026

# ISO332PGS

**Socomec ISO Enclosed Isolator, IP 65 Plastic Grey, Handle - Blue, 3P 32A**

ENCLOSED ISOLATORS

## DIMENSIONS

| | |
|---|---|
| Depth | 81 mm |
| Weight | 0.39 kg |
| Connectable conductor cross section | 2.5-10 mm² |






Published on 02 November 2026

# ISO332PGS

**Socomec ISO Enclosed Isolator, IP 65 Plastic Grey, Handle - Blue, 3P 32A**

ENCLOSED ISOLATORS

## DIMENSIONAL DIAGRAM

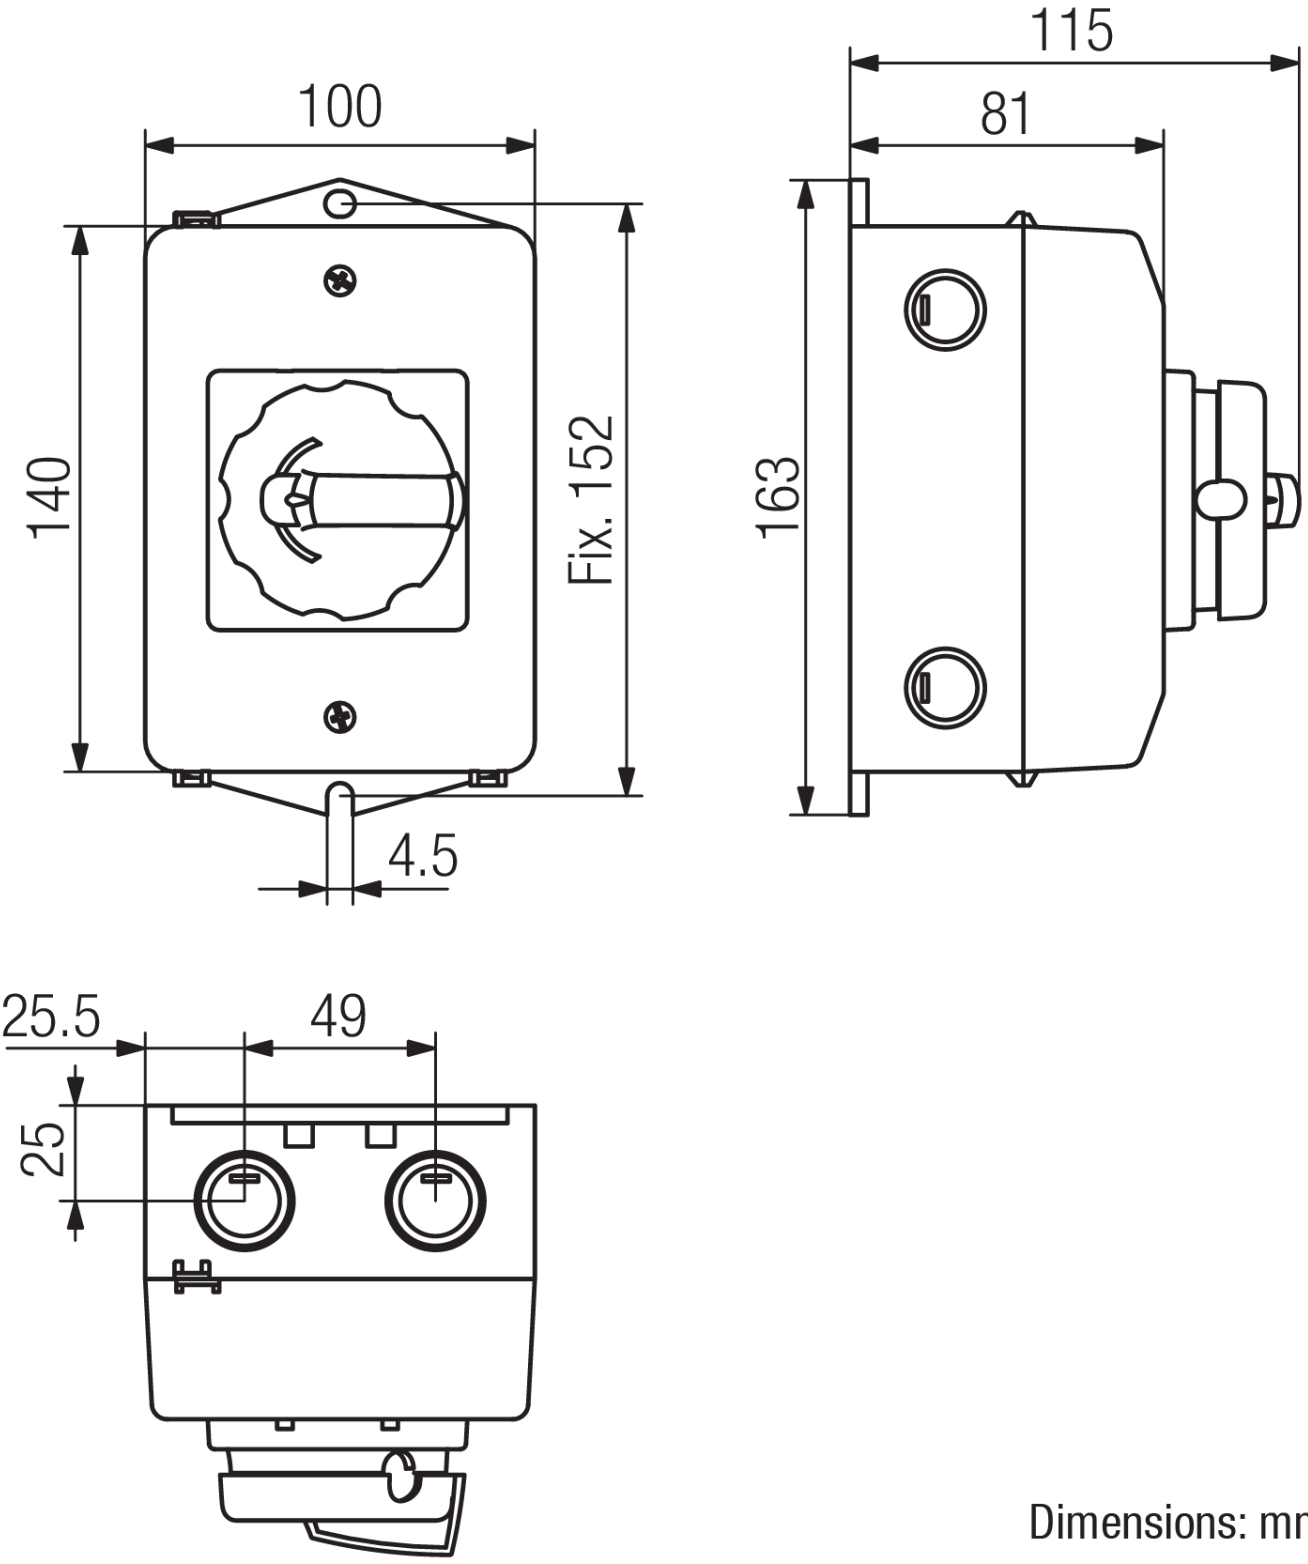


Dimensions: mm



Published on 02 November 2026

## RELATED PRODUCTS

### ACCESSORY



**Item No:** 21134001

**Required:** No

**Description:** Socomec ISO Auxiliary Contact, 1 N.O + 1 N.C, suits Plastic Enclosure 25 - 100A

**Item No:** 21134002

**Required:** No

**Description:** Socomec ISO Auxiliary Contact, 2 N.O + 2 N.C, suits Plastic Enclosure 25 - 100A



**Item No:** 21155005

**Required:** No

**Description:** Socomec ISO Neutral Pole - Unswitched (Solid), suits Plastic Enclosure 25 - 32A



**Item No:** 21155007

**Required:** No

**Description:** Socomec ISO Neutral Pole - Unswitched (Solid), suits Plastic Enclosure 40 - 63A

**Item No:** 21155009

**Required:** No

**Description:** Socomec ISO Neutral Pole - Unswitched (Solid), suits Plastic Enclosure 80A



**Item No:** 21155011

**Required:** No

**Description:** Socomec ISO Neutral Pole - Unswitched (Solid), suits Plastic Enclosure 100 - 125A



**Item No:** 21NH0301

**Required:** No

**Description:** Socomec ISO EMC Kit, suits Plastic Enclosure 25 - 40A