LTHSAUX1

Microelettrica Contactor Auxiliary Contact with 1NO and 1NC Contact Left Hand Mount for LTHS125

NHP ELECTRICAL ENGINEERING PRODUCTS

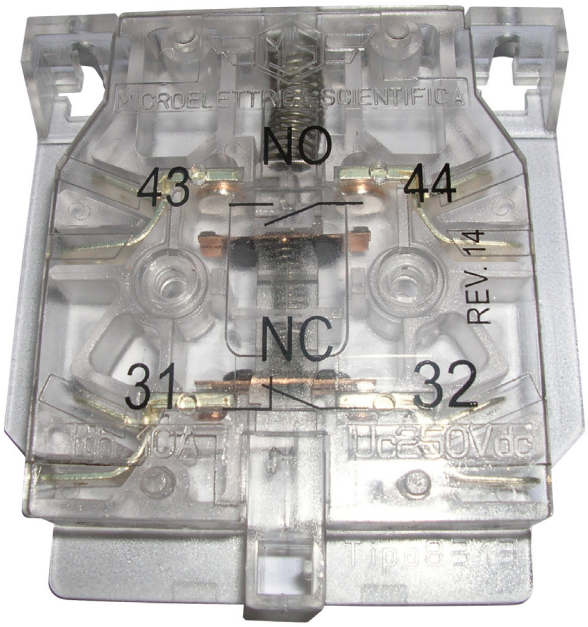

Component type	Auxiliary contact block
Range	Contactor
Model	N/A
Product status	Existing

The Microelettrica contactors are designed for railway rolling stock and fixed applications offering high reliability and low maintenance. High performance is achieved through a strongly optimised design, ensuring a robust dimensioning of components with reduced weight and cost savings while fully containing the electric arc inside the arc-chute.

ELECTRICAL	**Number of contacts as normally open contact**	1
	Number of contacts as normally closed contact	1
	Min. contact rating current	20 mA
	Min. contact rating voltage	16 V
	Type of electric connection	Flat plug-in connection
CONSTRUCTION	**Mounting method**	Side mounting

Published on 24 June 2026

LTHSAUX1

Microelettrica Contactor Auxiliary Contact with 1NO and 1NC Contact Left Hand Mount for LTHS125

ELECTRICAL ENGINEERING PRODUCTS

DIMENSIONAL DIAGRAM

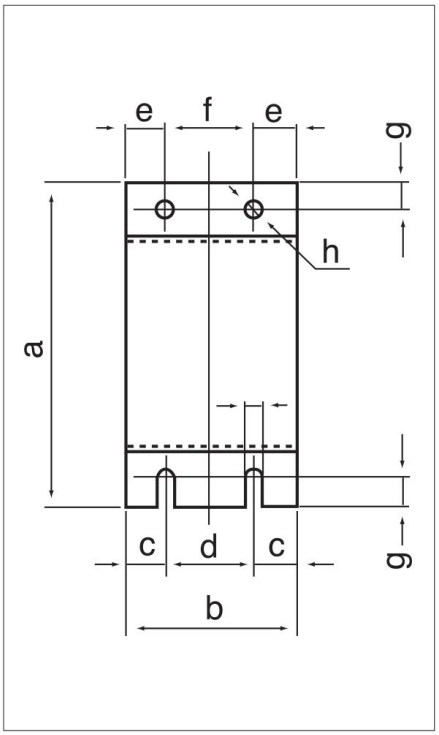

Mounting dimensions (mm)

DC contactors Cat. No.	No. of poles	a	b	c	d	e	f	g	h
LTHS60	1	156	45	22.5	-	8	29	8	7
	2	156	66	14	38	33	-	8	7
LTHS125	1	174	80	40	-	17.5	45	9	9
	2	174	108	10.5	87	10.5	87	9	9
LTHS320	1	228	85	42.5	-	20	45	10	9
	2	228	114	-	55	57	-	10	9
LTHS400	1	230	90	15	60	15	60	12.5	9
	2	230	180	15	150	15	150	12.5	9
LTHS650/800	1	260	90	15	60	15	60	15	11
	2	260	180	15	150	15	150	15	11
LTHS1250	1	260	90	15	60	15	60	15	11
	2	260	180	15	150	15	150	15	11
LTHS1500	1	260	90	15	60	15	60	15	11
	2	260	180	15	150	15	150	15	11
LTHS1700	1	260	90	15	60	15	60	15	11
	2	212	235	15	150	14	207	37	11

Published on 24 June 2026