NEMO72B13

IME Nemo 72 Multifunction Meter CT Connect 1 and 3 and 4 Phase 5A

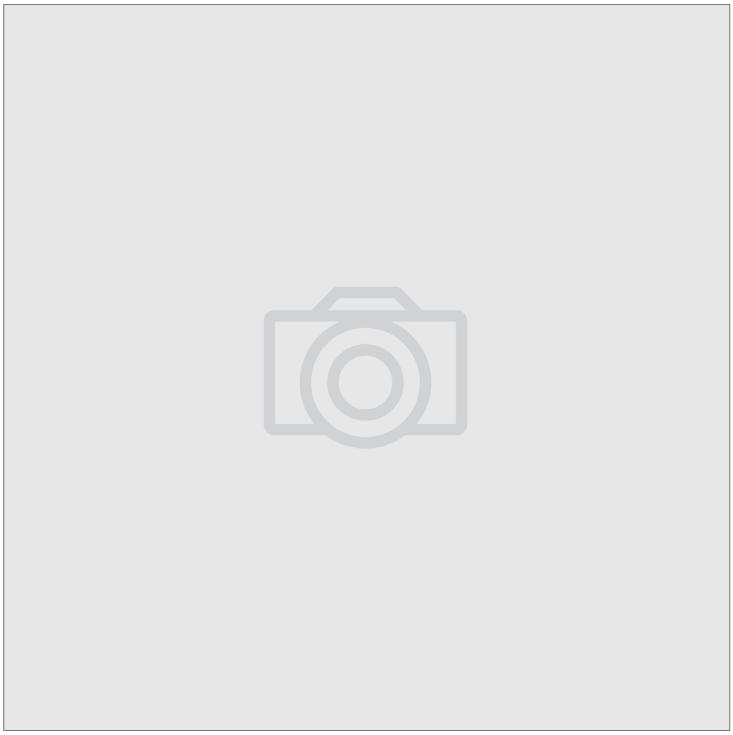

Component type	Multifunction energy meter
Range	Digital Meter
Model	N/A
Product status	Phased Out

NHP offers a comprehensive range of IME digital meters in both panel mount and DIN mount versions, available in a number of different configurations.

ELECTRICAL	**Frequency**	47-63 Hz
	Rated insulation voltage Ui	300 V
	Pulse counter	No
	Refresh time	1.2 s
	Type of display	LCD
	Measurement parameter VA	Yes
	Measurement parameter VAR	Yes
	Measurement parameter F	Yes
	Measurement parameter PF	Yes
	Measurement parameter VL-L	Yes
	Measurement parameter VL-N	Yes
	Measurement parameter An	Yes
	Measurement parameter ADMD	Yes
	Measurement parameter WDMD	Yes
COMMUNICATION	**Supporting protocol for other bus systems**	No
CONSTRUCTION	**Mounting method**	To panel
	Material housing	PPE-PS
	Degree of protection (IP), front side	Other
DIMENSIONS	**Height**	72 mm
	Width	72 mm
	Depth	81 mm
	Weight	0.25 kg
ENVIRONMENT	**Operating temperature**	-5…55 °C
	Storage temperature	-25…70 °C
	Humidity type	Short-term condensing
	Pollution degree	2

Published on 02 December 2025