PCWLXLEDSBLK

Stanilite Nexus LX Platinum Circular Lighting Bulkhead Fitting Emergency IP65 Black



Component type	Emergency luminaire
Range	Nexus LX Platinum Circular Lighting
Model	N/A
Product status	Existing

The Stanilite NexusLX Platinum circular lighting range features energy saving LED light source, efficient lithium power and an aesthetically pleasing design.

ELECTRICAL	Operating mode	Maintained
	Nominal voltage	240 V
	Voltage type	AC
	Max. system power	21.8 W
	Nominal operation time	50000 h
COMMUNICATION	Monitoring equipment	Cable system monitoring
CONSTRUCTION	With remote switch connection	No
	With remote control	No
	Mounting method	Wall surface mounted / ceiling surface mounting
	With pictogram	No
	With light source	Yes
	Material housing	Aluminium die-cast
	Colour housing	Black
	Material cover	Polycarbonate (PC)
	IP rating	IP65
MECHANICAL	Impact strength	IK10
PHOTOMETRIC	Lamp type	LED not exchangeable
	Photometric classification (C0)	D16
	Photometric classification	D16
DIMENSIONS	Width	363 mm
	Height/depth	142 mm
	Length	363 mm
	Outer diameter	363 mm
ENVIRONMENT	Rated ambient temperature according to IEC62722-2-1	0…40 °C
CERTIFICATES/APPROVALS	Compliant to AS/NZS CISPR 15	Yes


Published on 17 April 2026

PCWLXLEDSBLK

Stanilite Nexus LX Platinum Circular Lighting Bulkhead Fitting Emergency IP65 Black

CERTIFICATES/APPROVALS	**Compliant to AS/NZS 2293.3:2018**	Yes
	Compliant to AS/NZS 60598.1:2017	Yes
	Compliant to AS/NZS 60598.2.22:2005	Yes

DIMENSIONAL DIAGRAM

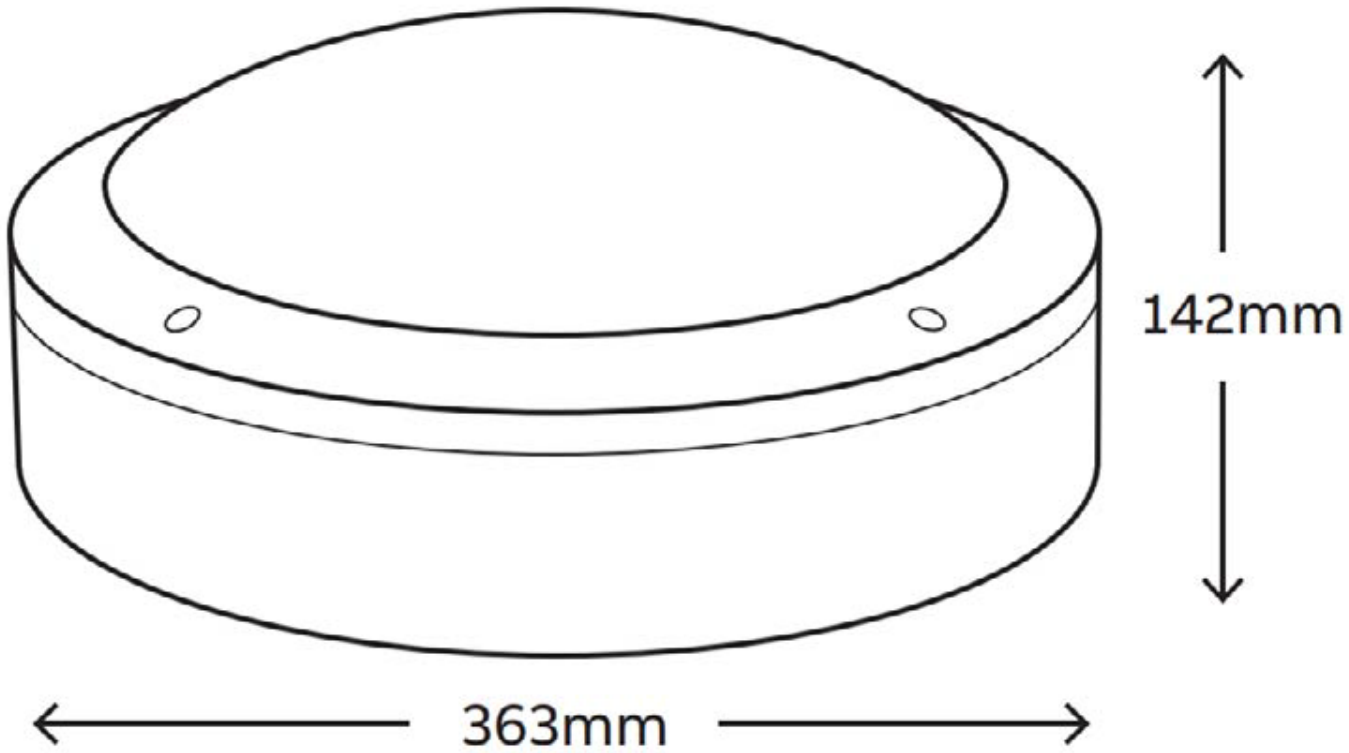

RELATED PRODUCTS

ACCESSORY



Item No: 0301301P

Required: No

Description: Stanilite Emergency Battery Pack Lifepo4 3.2V 3.2Ah

Published on 17 April 2026