PCWRFLEDSMDBLK

Stanilite Nexus RF Platinum Circular Lighting Bulkhead Fitting Emergency IP65 MD Black



Component type	Emergency luminaire
Range	Nexus RF Platinum Circular Lighting
Model	N/A
Product status	Existing

The Stanilite NexusRF Platinum circular lighting range features an energy saving LED light source, efficient lithium power and has an aesthetically pleasing design.


ELECTRICAL	**Operating mode**	Maintained
	Nominal voltage	240 V
	Voltage type	AC
	Max. system power	21.8 W
	Nominal operation time	50000 h
COMMUNICATION	**Monitoring equipment**	Radio frequency (RF)
CONSTRUCTION	**With remote switch connection**	No
	With remote control	No
	Mounting method	Wall surface mounted / ceiling surface mounting
	With pictogram	No
	With light source	Yes
	Material housing	Aluminium die-cast
	Colour housing	Black
	Material cover	Polycarbonate (PC)
	IP rating	IP65
MECHANICAL	**Impact strength**	IK10
PHOTOMETRIC	**Lamp type**	LED not exchangeable
	Photometric classification (C0)	D16
	Photometric classification	D3.2
	With movement sensor	Yes
DIMENSIONS	**Width**	363 mm
	Height/depth	142 mm
	Length	363 mm
	Outer diameter	363 mm
ENVIRONMENT	**Rated ambient temperature according to IEC62722-2-1**	0…40 °C

Published on 17 April 2026

PCWRFLEDSMDBLK

Stanilite Nexus RF Platinum Circular Lighting Bulkhead Fitting Emergency IP65 MD Black

DIMENSIONAL DIAGRAM

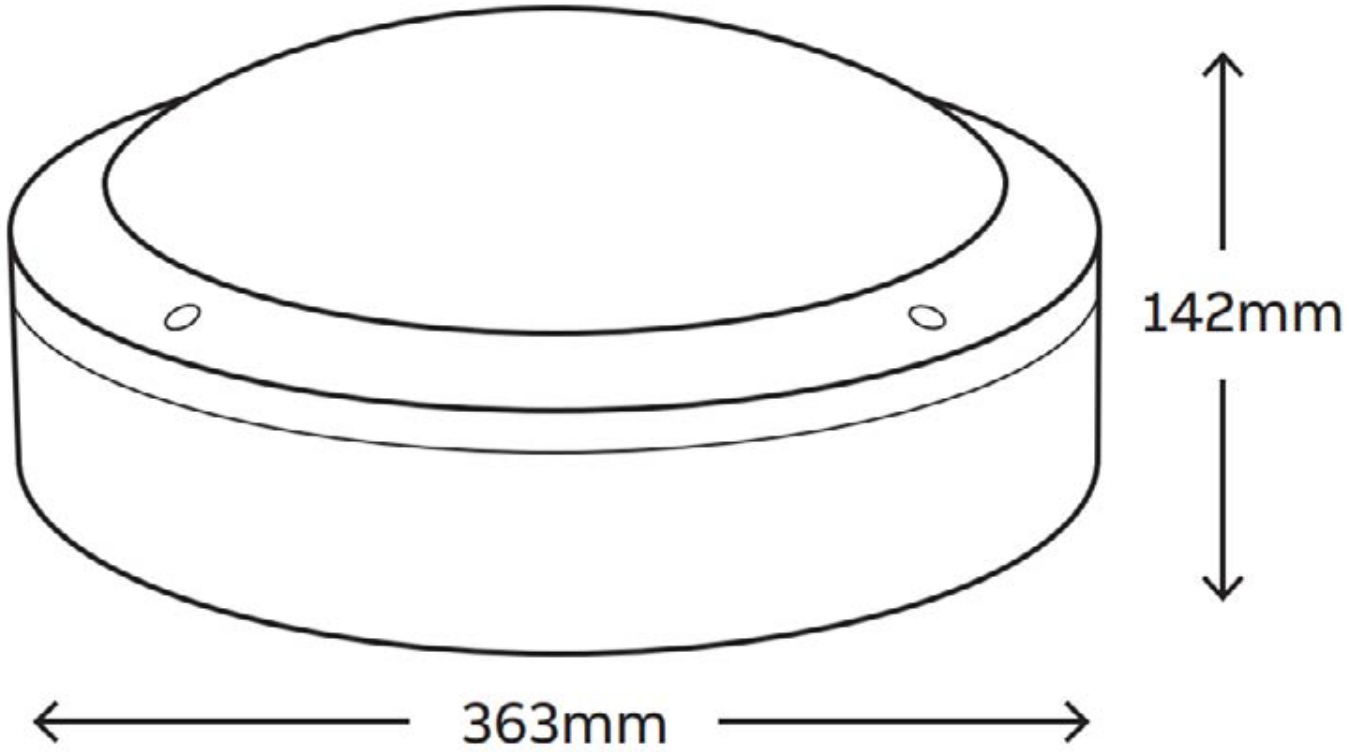

RELATED PRODUCTS

ACCESSORY



Item No: 0301301P

Required: No

Description: Stanilite Emergency Battery Pack Lifepo4 3.2V 3.2Ah

Published on 17 April 2026