PLQNRFLEDPBBWD

Stanilite Single Point Platinum Exit Lighting LED Edgelit Quickfit RF Black And White

Stanilite®



Component type	Emergency luminaire
Range	Single Point Platinum Exit Lighting
Model	N/A
Product status	Existing

The Stanilite single point Platinum exit lighting range features energy saving LED light source, efficient lithium power and fully retrofittable to previous generations of Quickfits.

ELECTRICAL	Operating mode	Maintained
	Nominal voltage	240 V
	Voltage type	AC
	Max. system power	2.8 W
	Viewing distance	24 m
	Nominal operation time	100000 h
	Driver type	LED
COMMUNICATION	Monitoring equipment	Radio frequency (RF)
CONSTRUCTION	With remote switch connection	No
	With remote control	No
	Mounting method	Wall/ceiling/suspension
	With pictogram	Yes
	With light source	Yes
	Material housing	Polycarbonate (PC)
	Colour housing	Black
	Material cover	Polycarbonate (PC)
	IP rating	IP20
PHOTOMETRIC	Lamp type	LED not exchangeable
	Photometric classification (C0)	D3.2
	Photometric classification	E2
DIMENSIONS	Width	72 mm
	Height/depth	232 mm
	Length	379 mm
ENVIRONMENT	Rated ambient temperature according to IEC62722-2-1	0…40 °C
CERTIFICATES/APPROVALS	Compliant to AS/NZS CISPR 15	Yes
	Compliant to AS/NZS 2293.3:2018	Yes

Published on 17 April 2026


PLQNRFLEDPBBWD

Stanilite Single Point Platinum Exit Lighting LED Edgelit Quickfit RF Black And White

Stanilite®

CERTIFICATES/APPROVALS		
	Compliant to AS/NZS 60598.1:2017	Yes
	Compliant to AS/NZS 60598.2.22:2005	Yes

DIMENSIONAL DIAGRAM

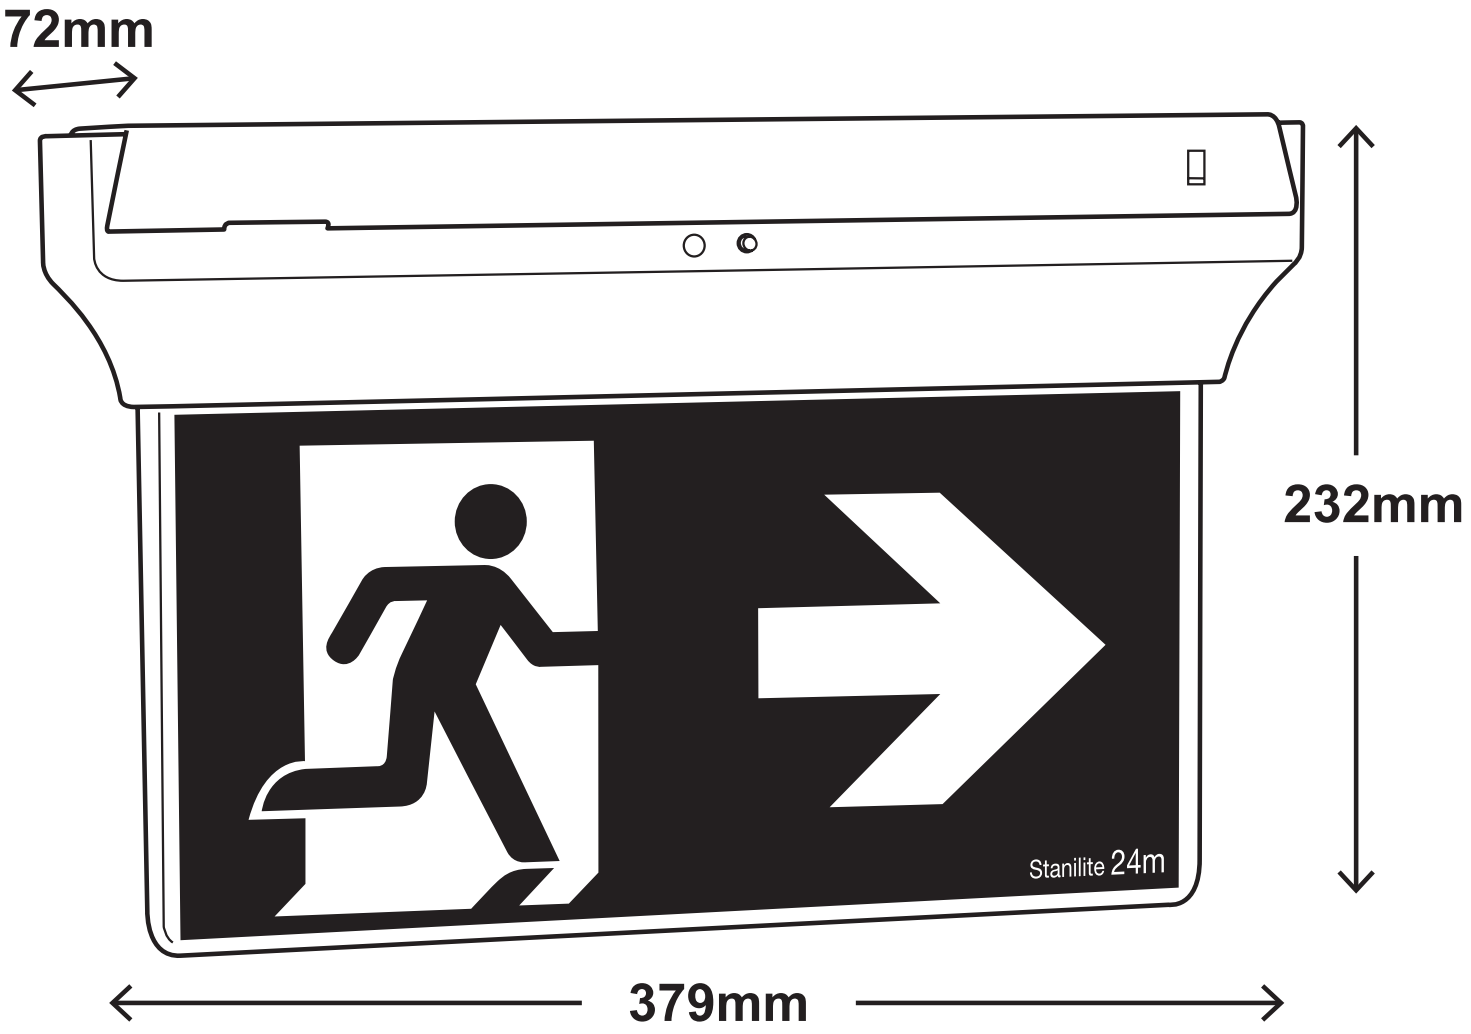

RELATED PRODUCTS

ACCESSORY



Item No: 0301305P

Required: No

Description: Stanilite Emergency Battery Pack Lifepo4 3.2V 1.5Ah



Item No: MQFCL

Required: No

Description: Stanilite Emergency Accessories Bracket Add On Cantilever Bracket Mount Quickfit Series

Published on 17 April 2026