PQFJLED1

Stanilite Single Point Platinum Exit Lighting LED Quickfit Jumbo Wall or Ceiling Mount SS

Stanilite®



Component type	Emergency luminaire
Range	Single Point Platinum Exit Lighting
Model	N/A
Product status	Existing

The Stanilite single point Platinum exit lighting range features energy saving LED light source, efficient lithium power and fully retrofittable to previous generations of Quickfits.

ELECTRICAL	Operating mode	Maintained
	Nominal voltage	240 V
	Voltage type	AC
	Max. system power	9 W
	Viewing distance	36 m
	Nominal operation time	100000 h
	Driver type	LED
CONSTRUCTION	With remote switch connection	No
	With remote control	No
	Mounting method	Wall/ceiling/suspension
	With pictogram	Yes
	With light source	Yes
	Material housing	ABS
	Colour housing	White
	Material cover	Acrylic
	IP rating	IP20
PHOTOMETRIC	Lamp type	LED not exchangeable
	Photometric classification (C0)	E1.25
	Photometric classification	E1.25
DIMENSIONS	Width	122 mm
	Height/depth	305 mm
	Length	636 mm
ENVIRONMENT	Rated ambient temperature according to IEC62722-2-1	0…40 °C
CERTIFICATES/APPROVALS	Compliant to AS/NZS CISPR 15	Yes
	Compliant to AS/NZS 2293.3:2018	Yes

Published on 17 April 2026

PQFJLED1

Stanilite Single Point Platinum Exit Lighting LED Quickfit Jumbo Wall or Ceiling Mount SS

Stanilite®

CERTIFICATES/APPROVALS		
	Compliant to AS/NZS 60598.1:2017	Yes
	Compliant to AS/NZS 60598.2.22:2005	Yes

DIMENSIONAL DIAGRAM

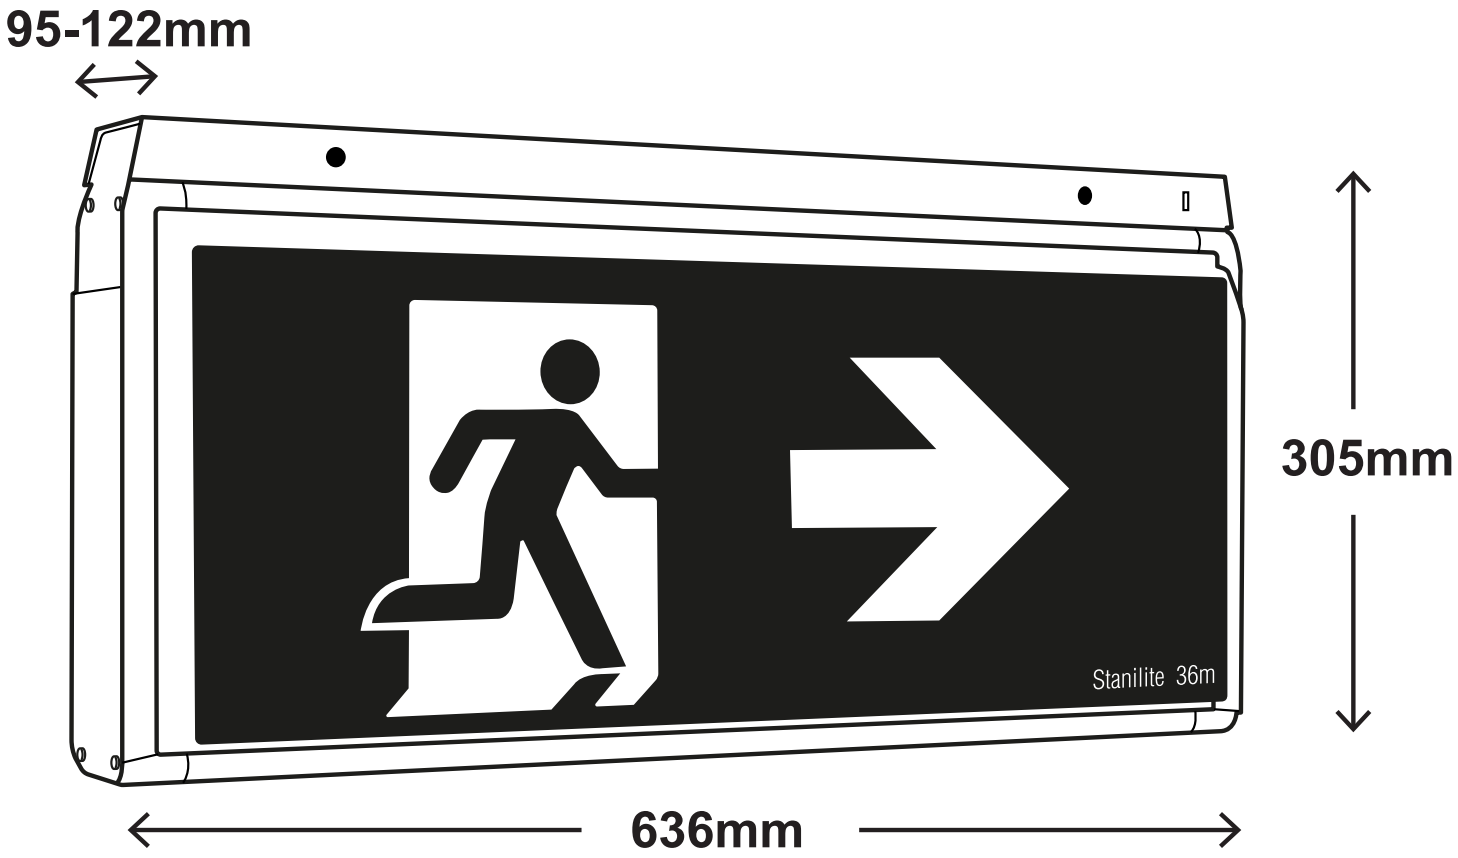

RELATED PRODUCTS

ACCESSORY



Item No: 0301317P
Required: No
Description: Stanilite Emergency Battery Pack Lifepo4 Straight Bracket 6.4V 3.2A 3WR



Item No: 31PQJ2
Required: No
Description: Stanilite Emergency Diffuser QF Jumbo 18W Picto Running Man Arrow Left



Item No: 31PQJ1
Required: No
Description: Stanilite Emergency Diffuser QF Jumbo 18W Picto Running Man



Item No: 31PQJ3
Required: No
Description: Stanilite Emergency Diffuser QF Jumbo 18W Picto Running Man Arrow Right

Published on 17 April 2026