PWEXLEDREM3P

Stanilite Single Point Platinum Exit Lighting LED Weather Proof Remote Body Only Right

Stanilite®



Component type	Emergency luminaire
Range	Single Point Platinum Exit Lighting
Model	N/A
Product status	Existing

The Stanilite single point Platinum exit lighting range features energy saving LED light source, efficient lithium power and fully retrofittable to previous generations of Quickfits.

ELECTRICAL	Operating mode	Maintained
	Viewing distance	24 m
	Nominal operation time	100000 h
	Driver type	LED
CONSTRUCTION	With remote switch connection	No
	With remote control	No
	Mounting method	Wall surface mounted
	With pictogram	Yes
	With light source	Yes
	Material housing	Polycarbonate (PC)
	Colour housing	Grey
	Material cover	Polycarbonate (PC)
	IP rating	IP67
MECHANICAL	Impact strength	IK09
PHOTOMETRIC	Lamp type	LED not exchangeable
	Photometric classification (C0)	D1.25
	Photometric classification	C1.25
DIMENSIONS	Width	130 mm
	Height/depth	190 mm
	Length	380 mm
ENVIRONMENT	Rated ambient temperature according to IEC62722-2-1	-30…40 °C
CERTIFICATES/APPROVALS	Compliant to AS/NZS CISPR 15	Yes
	Compliant to AS/NZS 2293.3:2018	Yes
	Compliant to AS/NZS 60598.1:2017	Yes
	Compliant to AS/NZS 60598.2.22:2005	Yes

Published on 17 April 2026

PWEXLEDREM3P

Stanilite Single Point Platinum Exit Lighting LED Weather Proof Remote Body Only Right

DIMENSIONAL DIAGRAM

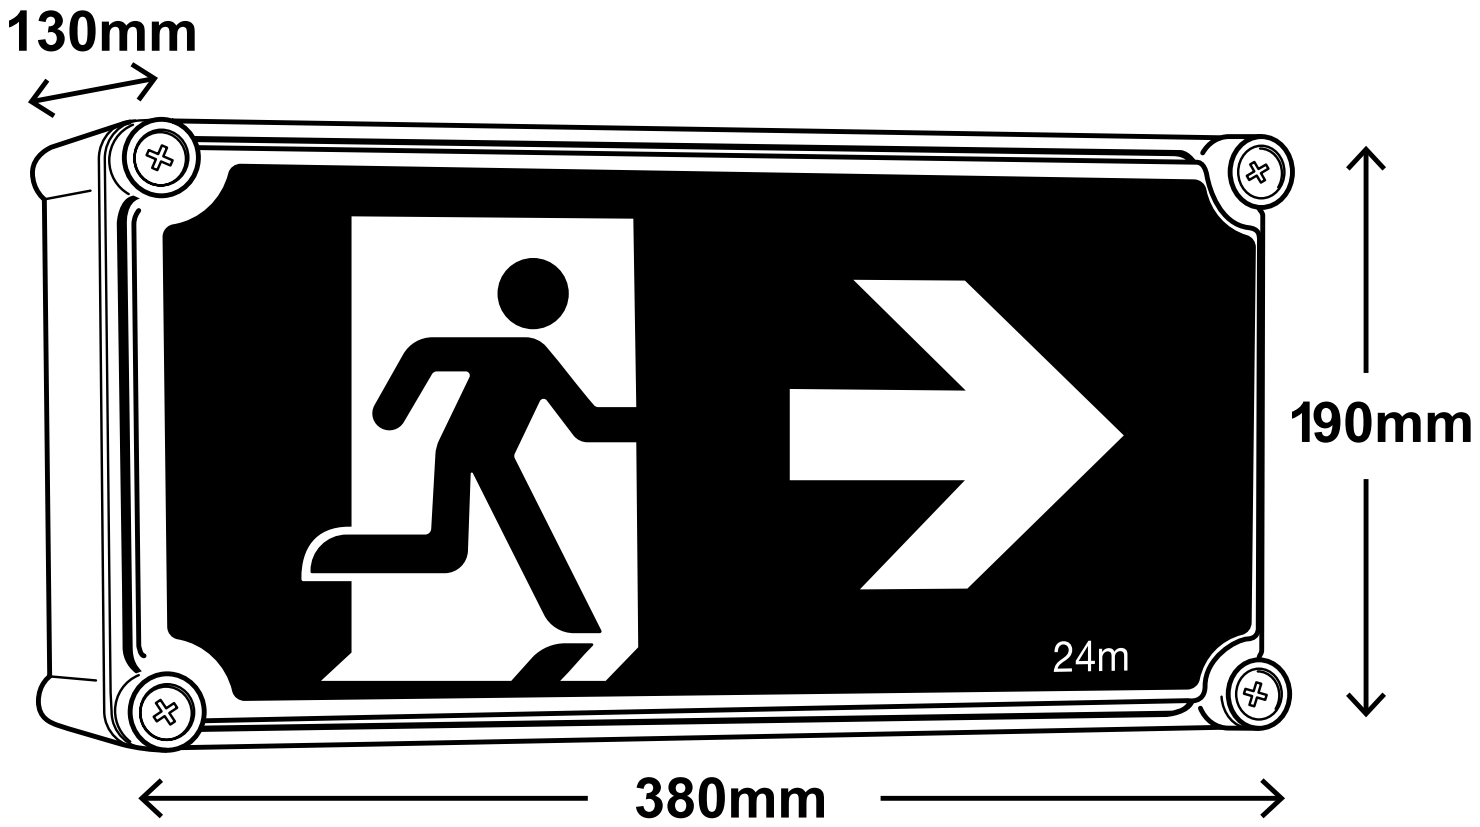

RELATED PRODUCTS

ACCESSORY



Item No: 31PWE3

Required: No

Description: Stanilite Emergency Diffuser Weather Proof 10W Picto including Clear Lid Arrow Right



Item No: PSLED1W6P

Required: No

Description: Stanilite Single Point Platinum Exit Lighting Power Supply Unit Remote for Exit LED



Item No: PSNRFLED1W6P

Required: No

Description: Stanilite Nexus RF Platinum Exit Lighting Power Supply for Remote Mount Quickfit



Item No: PSNXSLED1W6P

Required: No

Description: Stanilite Nexus LX Platinum Exit Lighting Power Supply Unit Remote for Exit LED

Published on 17 April 2026