RFRXSW9154S

Steute Wireless Universal Receiver 915MHz 24VACDC 4 Channel Relay Output plus 2 5dB Antenna

WIRELESS DEVICES

.steute



Component type	
Range	Wireless Receiver with Relay
Model	N/A
Alternative	CALL FOR ALTERNATIVE

Steute wireless receivers are easily mounted inside control cabinets located outside Ex zones capable of receiving and processing signals sent by wireless switching devices in the field. Available in various models suitable for top hat rail mounting in differing in switching outputs (one, two, or four). The range includes variants with RS-232 and TCP/IP gateways.

Published on 14 August 2026


RFRXSW9154S

Steute Wireless Universal Receiver 915MHz 24VACDC 4 Channel Relay Output plus 2 5dB Antenna

WIRELESS DEVICES

.steute

DIMENSIONAL DIAGRAM

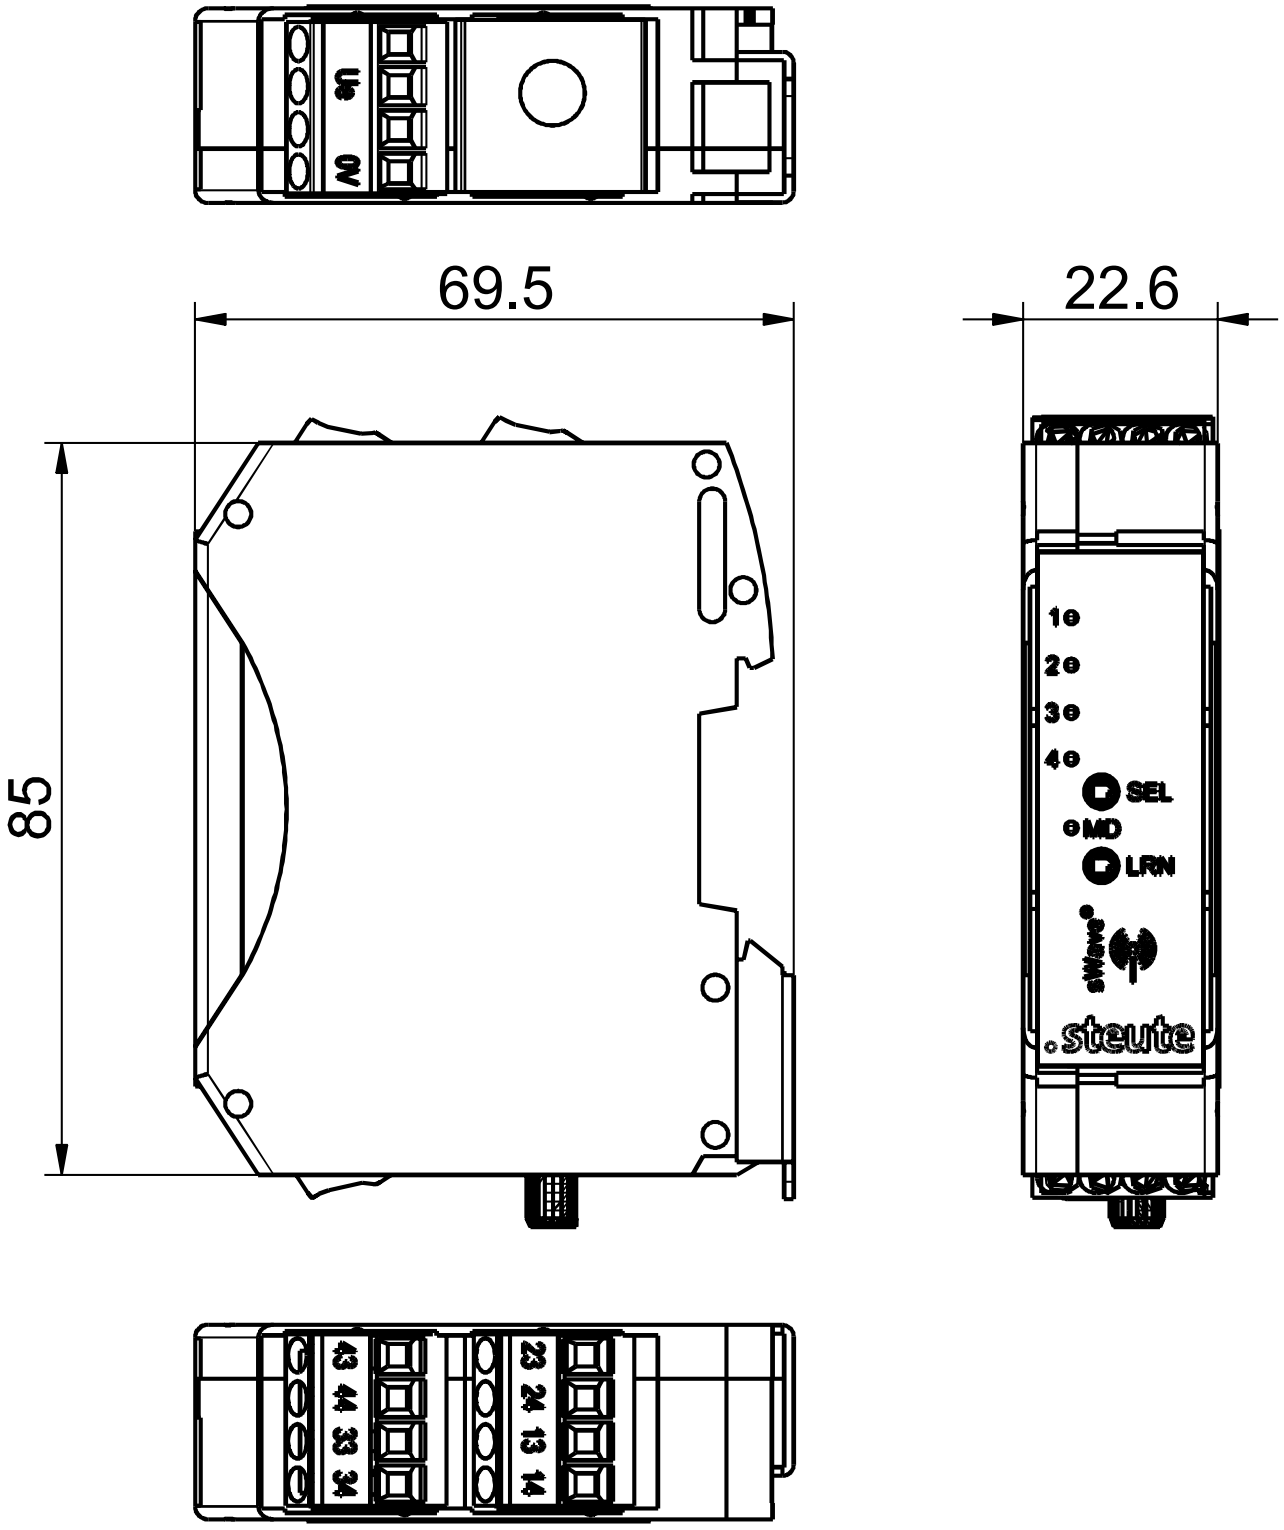

Published on 14 August 2026