RLB16044P

Socomec RLB Load Break Switch kit, w/ 415V AC Shunt and direct handle, 4P 160A

LOAD BREAK SWITCHES

Component type	Switch disconnector
Range	RLB
Model	N/A
Alternative	NO ALTERNATIVE ITEM

The RLB series consisting of the smaller IDE and larger Sidermat range of remote trip load break switches are fully functional, remote breaking isolators with a range extending from 40A to 1800A. Protecting personnel against insulation faults via its special remote trip function, it can also offer protection against overloads when combined with suitable current transformers and thermal relays.

ELECTRICAL	Rated permanent current at AC-21, 400 V	160 A
	Rated uninterrupted current Iu	160 A
	Number of poles	4
	Rated operation power at AC-23, 400 V	80 kW
	Rated operation current Ie at AC-23a, 400 V	160 A
	Rated insulation voltage Ui	690 V
	Rated impulse withstand voltage Uimp	8 kV
	Rated operating voltage	415 V
CONSTRUCTION	Degree of protection (IP), front side	IP65
MECHANICAL	Padlock locking	Yes

DIMENSIONAL DIAGRAM

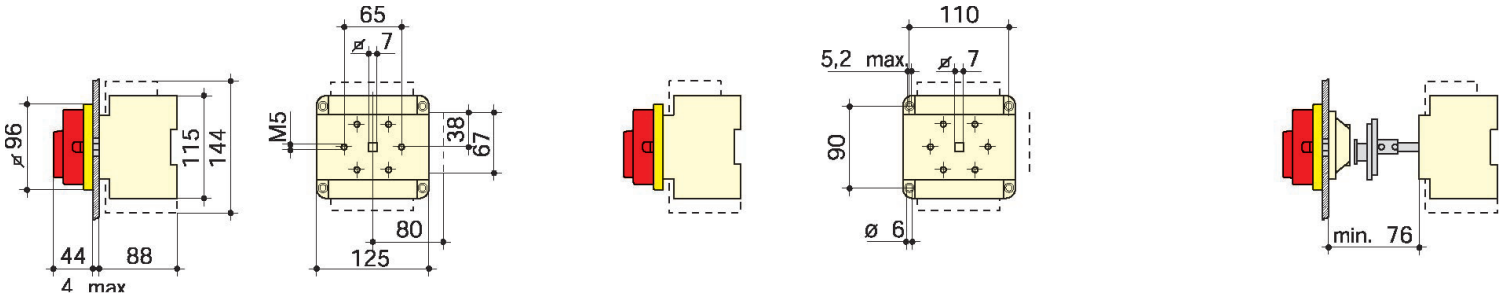

Published on 24 July 2026