# SSPC715240VAC

**S+S SPC Soft Starter Enclosed 3 Wire 15kW 240VAC**




| | |
|---|---|
| **Component type** | Motor starter/Motor starter combination |
| **Range** | Soft Starter |
| **Model** | N/A |
| **Product status** | Existing |

The Sprecher + Schuh PCS Softstarter Controller is specifically designed to start 3-phase motors (up to 460V / 575V), in a compact, easy to use and DIN-rail mountable for models up to 85A.

| | | |
|---|---|---|
| **ELECTRICAL** | **Type of motor starter** | Other |
| | **Rated operation power at AC-3, 400 V** | 15 kW |
| | **Rated operation current Ie** | 30 A |
| | **Long time overload protection adjustment range** | 10-30 A |
| | **Release class** | Adjustable |
| | **Voltage type for actuating** | AC |
| | **Control supply voltage Us at AC 50HZ** | 240 V |
| **CONSTRUCTION** | **Device construction** | Enclosed |
| | **Material** | Plastic |
| | **IP rating** | IP66 |
| **DIMENSIONS** | **Depth** | 180 mm |
| | **Height** | 280 mm |
| | **Width** | 280 mm |

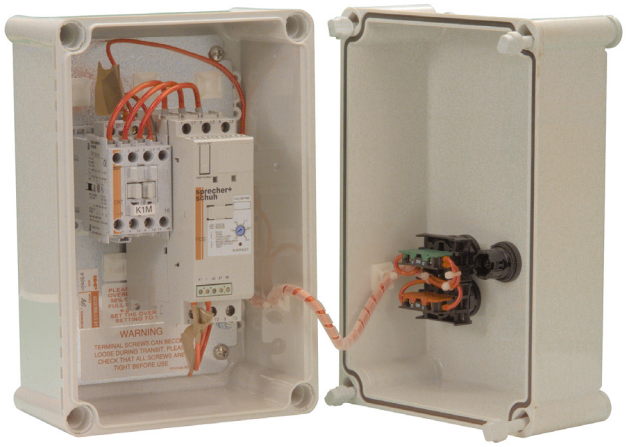

Published on 29 May 2026