WPB4FTRF

Stanilite Platinum Batten LED IP65 4FT RF Switchable



Component type	Emergency luminaire
Range	Nexus RF Platinum Batten
Model	N/A
Product status	Existing

The Stanilite NexusRF Platinum batten range features an energy saving LED light source, efficient lithium power and is retrofittable to previous T8 profile installations.

ELECTRICAL	Nominal voltage	240 V
	Voltage type	AC
	Max. system power	38.5 W
	Nominal operation time	50000 h
	Inrush current	790 mA
	Driver type	LED
	Driver output power	26.5-38.5 W
	Driver output current	400-660 mA
COMMUNICATION	Monitoring equipment	Radio frequency (RF)
CONSTRUCTION	With remote switch connection	No
	With remote control	No
	Mounting method	Wall/ceiling/suspension
	With pictogram	No
	With light source	Yes
	Material housing	Polycarbonate (PC)
	Colour housing	Grey
	Material cover	Polycarbonate (PC)
	IP rating	IP65
MECHANICAL	Impact strength	IK08
PHOTOMETRIC	Lamp type	LED not exchangeable
	Photometric classification (C0)	D80
	Photometric classification	D63
DIMENSIONS	Width	130 mm
	Height/depth	88 mm
	Length	1265 mm
ENVIRONMENT	Rated ambient temperature according to IEC62722-2-1	0…40 °C

Published on 17 April 2026

WPB4FTRF


Stanilite Platinum Batten LED IP65 4FT RF Switchable


Stanilite®

CERTIFICATES/APPROVALS	**Compliant to AS/NZS CISPR 15**	Yes
	Compliant to AS/NZS 2293.3:2018	Yes
	Compliant to AS/NZS 60598.1:2017	Yes
	Compliant to AS/NZS 60598.2.22:2005	Yes

DIMENSIONAL DIAGRAM

Size	L	W	H	B
4ft	1265	130	88	905

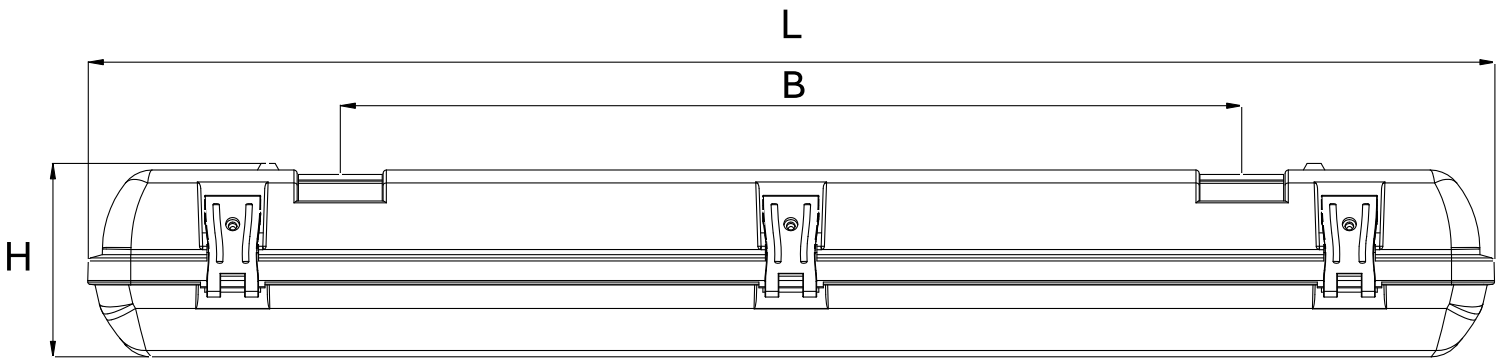



RELATED PRODUCTS

ACCESSORY



Item No: 0301307P

Required: No

Description: Stanilite Emergency Battery Pack Lifepo4 Side By Side Bracket 2C 6.4V 3.2Ah 3WR



Item No: 26PBMD001

Required: No

Description: Stanilite Emergency Accessories Wall Mount Bracket Pair 45 Degree

Published on 17 April 2026