# 20F1AGC260JA0NNNNN

**Allen-Bradley PowerFlex 753 VSD 400V IP54 260A 132kW ND or 205A 110kW HD Frame 7**

LARGE DRIVES

NHP Allen-Bradley




| | |
|---|---|
| **Component type** | Frequency converter =< 1 kV |
| **Range** | PowerFlex 753 |
| **Model** | N/A |
| **Product status** | Existing |

The Allen-Bradley 753 AC Drives are a cost-effective and simple solution for general-purpose applications. Ideal for machine builders and system integrators wanting to minimise engineering costs while increasing productivity. Features built-in I/O as standard and available with a wide range of card options.

| | | |
|---|---|---|
| **ELECTRICAL** | Number of phases input | 3 |
| | Nominal input voltage | 400 V |
| | Nominal output power AC | 132 kW |
| | Nominal output current I2N | 260 A |
| | kW rating, normal duty | 132 kW |
| | kW rating, heavy duty | 110 kW |
| | Dynamic braking transistor | Yes |
| | Control characteristic | PID |
| | EMC-version | Yes |
| **COMMUNICATION** | Integrated motion function | No |
| **CONSTRUCTION** | Suitable for safety functions | Yes |
| | Contains keypad | No |
| | Frame size | 7 |
| | IP rating | IP54 |
| | Degree of protection (NEMA) | 12 |
| **DIMENSIONS** | Height | 1614 mm |
| | Width | 609.6 mm |
| | Depth | 464.8 mm |
| | Weight | 132 kg |
| **ENVIRONMENT** | Operating temperature | -20…60 °C |
| | Storage temperature | -40…70 °C |





Published on 18 August 2026

# 20F1AGC260JA0NNNNN

**Allen-Bradley PowerFlex 753 VSD 400V IP54 260A 132kW ND or 205A 110kW HD Frame 7**

LARGE DRIVES

## DIMENSIONAL DIAGRAM

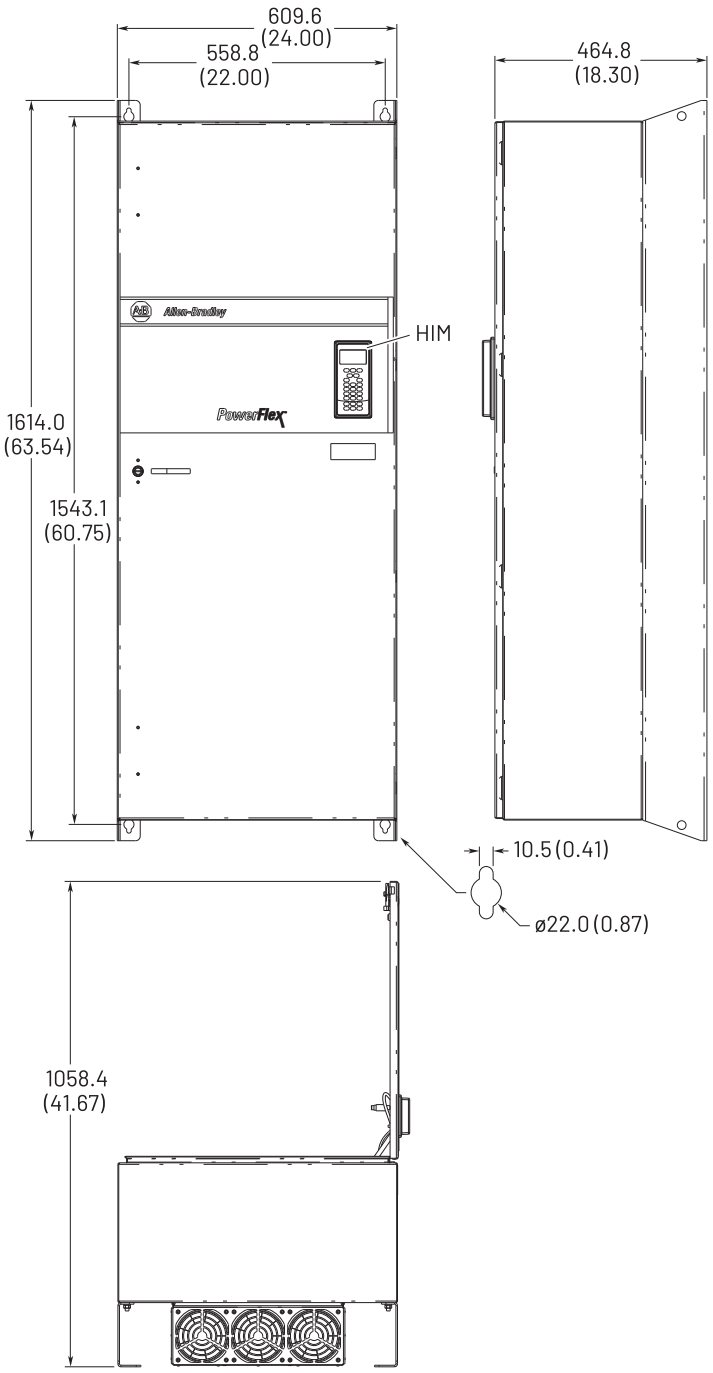


Dimensions are in millimeters and (inches).





Published on 18 August 2026