
20G1G4C650LNANNNNNP1

Allen-Bradley PowerFlex 755TL VSD 400V IP54 650A 355kW ND Top Cbl En Ex Door No Him F8

LARGE DRIVES

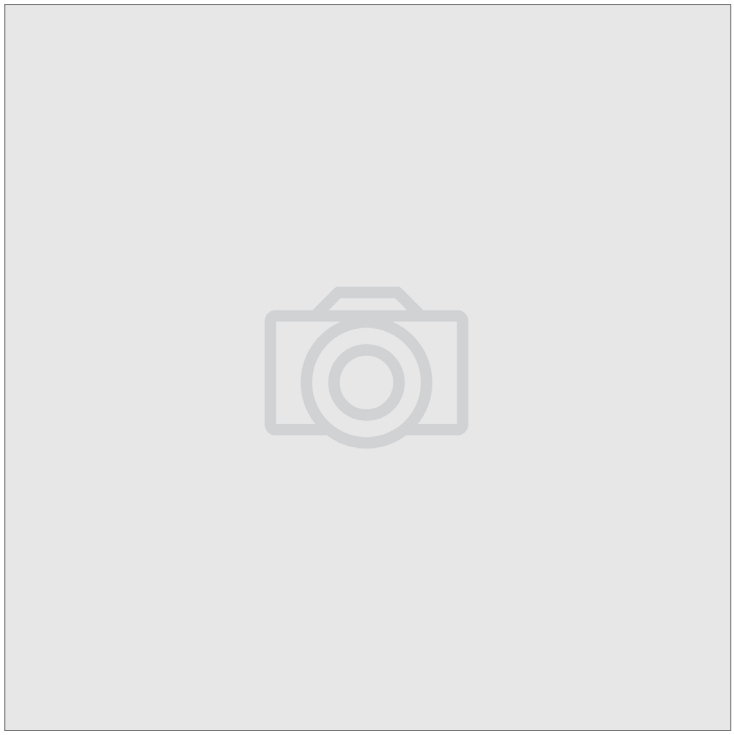

Component type	Frequency converter =< 1 kV
Range	PowerFlex 755T
Model	N/A
Alternative	20GEG4C650LNANNNNNP1

The Allen-Bradley PowerFlex 755T range of variable speed drives are an extension to the PowerFlex 750 drive portfolio providing solutions for harmonic mitigation and regeneration applications. Fitted with TotalFORCE technology they deliver high performance motor control, adaptive control of torque, velocity, position and predictive analytics on the drives health.

ELECTRICAL	Number of phases input	3
	Nominal input voltage	400 V
	Nominal output power AC	650 kW
	Nominal output current I2N	650 A
	kW rating, normal duty	355 kW
	Dynamic braking transistor	Yes
	Control characteristic	PID
	EMC-version	Yes
COMMUNICATION	Integrated motion function	No
CONSTRUCTION	Suitable for safety functions	Yes
	Contains keypad	Yes
	Frame size	8
	IP rating	IP54
	Degree of protection (NEMA)	12
DIMENSIONS	Height	2291 mm
	Width	1200 mm
	Depth	722 mm
	Weight	900 kg
ENVIRONMENT	Storage temperature	-40…70 °C

Published on 13 August 2026