800H3HZ4C

Allen-Bradley 800H Enclosure ThermoPlas Poly 3 Holes 3 4In Conduit Entry Grey for 30.5mm Pushbutton

PUSHBUTTON AND PILOT LIGHTS



Component type	Control circuit devices combination in enclosure
Range	800T/H Pushbutton
Model	N/A
Product status	Existing

The Allen-Bradley 800T/H range of 30.5mm mount operators are designed and constructed to perform in the most demanding industrial environments. The range includes pushbuttons, selector switches, emergency stops, pilot lights. Available in both metal and plastic types with a modular design allowing for easy selection, configuration and assembly of components to form the operator control device.

CONSTRUCTION	Number of push buttons	3
	Number of key switches	3
	Number of selector switches	3
	Number of mushroom-shaped push-buttons	3
	Colour housing cover	Grey
	Material housing	Plastic
MECHANICAL	Max. vibration acceleration	10 m/s²
	Max. vibration frequency, operational	2000 Hz
	Max. shock acceleration	100 g
DIMENSIONS	Height	180 mm
	Width	80 mm
	Depth	50 mm
ENVIRONMENT	Operating temperature	-40-55


Published on 01 October 2026

800H3HZ4C

Allen-Bradley 800H Enclosure ThermoPlas Poly 3 Holes 3 4In Conduit Entry Grey for 30.5mm Pushbutton

PUSHBUTTON AND PILOT LIGHTS

DIMENSIONAL DIAGRAM

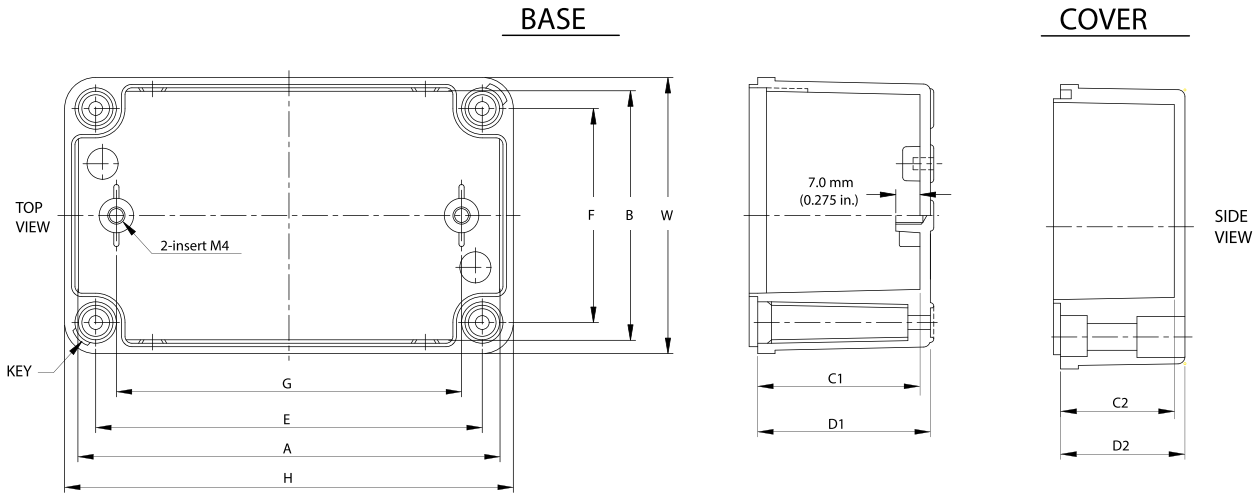

Thermoplastic Polyester Type 4/4X

Cat. No.	Overall Dimension				Inside Dimension				Enclosure Mounting Dimension		Mounting Plate Mounting Dim.
	H	W	D1	D2	A	B	C1	C2	E	F	G
800H-1HZ4__	110 (4.33)	80 (3.15)	50 (1.97)	20 (0.79)	104 (4.09)	74 (2.91)	46.5 (1.83)	16.5 (0.65)	92 (3.62)	62 (2.44)	80 (3.15)
800H-2HZ4__	130 (5.12)	80 (3.15)	50 (1.97)	35 (1.38)	120 (4.72)	70 (2.76)	46.5 (1.83)	31.5 (1.24)	112 (4.41)	62 (2.44)	100 (3.94)
800H-3HZ4__	180 (7.09)	80 (3.15)	50 (1.97)	35 (1.38)	170 (6.69)	70 (2.76)	46.5 (1.83)	31.5 (1.24)	162 (6.38)	62 (2.44)	150 (5.91)
800H-4HZ4__	250 (9.84)	80 (3.15)	50 (1.97)	35 (1.38)	240 (9.45)	70 (2.76)	46.5 (1.83)	31.5 (1.24)	232 (9.13)	62 (2.44)	220 (8.66)

Published on 01 October 2026