CA7PVS22

S+S CA7 Auxiliary Contact with 2NO Contacts and 2NC Contact

CONTACTORS

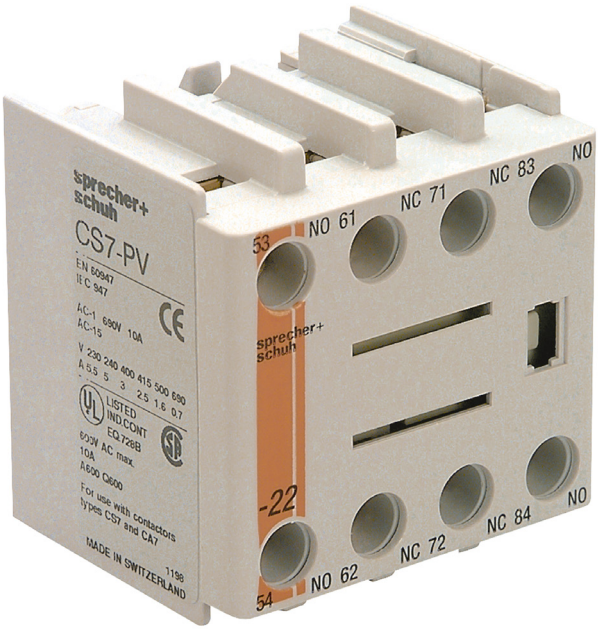

Component type	Auxiliary contact block
Range	CA7
Model	N/A
Product status	Existing

The Sprecher + Schuh CA7 contactors are the ideal solution for reliable and durable electrical components. It is a modern and flexible IEC power contactor for DOL starting needs with up to 100A AC3 and wide range selection covering from 4kW up to 63kW (400V).

ELECTRICAL	**Number of contacts as normally open contact**	2
	Number of contacts as normally closed contact	2
	Rated insulation voltage Ui	690 V
	Rated operation current Ie at AC-15, 24 V	6 A
	Rated operation current Ie at AC-15, 120 V	6 A
	Rated operation current Ie at AC-15, 240 V	5 A
	Rated operation current Ie at AC-15, 400 V	3 A
	Rated operation current Ie at DC-12, 24 V	12 A
	Rated operation current Ie at DC-12, 110 V	3.5 A
	Rated operation current Ie at DC-12, 220 V	0.55 A
	Rated operation current Ie at DC-13, 24 V	5 A
	Rated operation current Ie at DC-13, 110 V	1.2 A
	Rated operation current Ie at DC-13, 220 V	0.6 A
	Min. contact rating current	5 mA
	Min. contact rating voltage	17 V
	Rated operation current Ie at AC-15, 230 V	5.5 A
CONSTRUCTION	**Mounting method**	Top mounting

Published on 18 June 2026