DMWP12

NHP Loadcentre Insulated 12 Way DIN-T IP55

DIN-T™
LOADCENTRES AND POLE COVERS



Component type	Small distribution board
Range	DM
Model	N/A
Alternative	NWP12

NHP's DIN-MODULAR surface mounted insulated loadcentre range provides an option between DMWP weatherproof IP55 and DM150 IP40.

ELECTRICAL	Rated current In	120 A
	Number of outgoing ways	12
	Number of poles, 18mm pitch	12
	Max. rated operation voltage Ue AC	415 V
	Rated insulation voltage Ui	500 V
	Neutral terminal block	Yes
	Neutral bar rated current	100 A
	Earthing terminal block	Yes
CONSTRUCTION	Spare DIN equipment space (poles)	12
	DIN-rail	Yes
	Number of rows	1
	Material housing	Plastic
	Colour	Grey
	RAL-number	7035
	IP rating	IP55
	Type of cover	Door
	Transparent cover/door	Yes
	With lock	No
	Mounting method	Surface mounted (plaster)
MECHANICAL	Impact strength	IK07
DIMENSIONS	Width in number of modular spacings	12
	Height	250 mm
	Width	285 mm
	Depth	138 mm

Published on 09 December 2025

DMWP12

NHP Loadcentre Insulated 12 Way DIN-T IP55

DIN-T™
LOADCENTRES AND POLE COVERS

DIMENSIONAL DIAGRAM

Din-Modula weatherproof

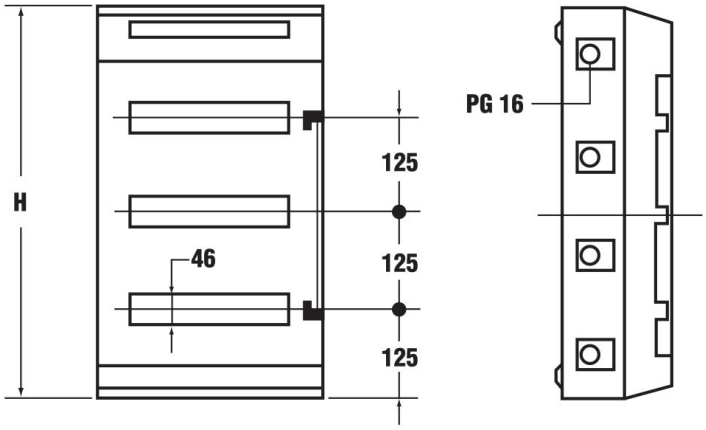

Cat. No.	Mod.	Rows	H	PG 16 (side)
DMWP12	12	1	250	2
DMWP24	24	2	375	3
DMWP36	36	3	500	4

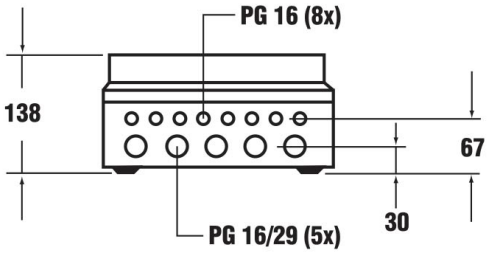

Published on 09 December 2025