

ISO325MYS

Socomec ISO Enclosed Isolator, IP 65 Aluminium Yellow,
Handle - Red, 3P 25A



Component type	Switch disconnector
Range	ISO
Model	N/A
Product status	Existing

The Socomec ISO enclosed isolators deliver IP65, wall mountable, switching solutions ensuring coverage for any application. With a choice of plastic, aluminium and 316 stainless steel enclosures ranging from 25A to 250A, the range suits all environments. All handles allow for up to 3 padlocks in the OFF position and enclosure interlocking when in the ON position.

ELECTRICAL

Rated permanent current Iu	25 A
Number of poles	3
Frequency	50/60 Hz
Rated operation current Ie at AC-23a, 690 V	25 A
Rated short-time withstand current Icw	2.5 kA
Rated operating voltage	690 V
Conditioned rated short-circuit current Iq	5.4 kA
Number of auxiliary contacts as normally closed contact	0
Number of auxiliary contacts as normally open contact	0

CONSTRUCTION

Colour control element	Red
Degree of protection (IP), front side	IP65
Degree of protection (NEMA)	4X
Version as reversing switch	No

MECHANICAL

Padlock locking	Yes
-----------------	-----


DIMENSIONS

Height	168 mm
Width	160 mm
Depth	125 mm
Weight	0.18 kg
Connectable conductor cross section	1.5-16 mm ²

ISO325MYS

Socomec ISO Enclosed Isolator, IP 65 Aluminium Yellow,
Handle - Red, 3P 25A

DIMENSIONAL DIAGRAM

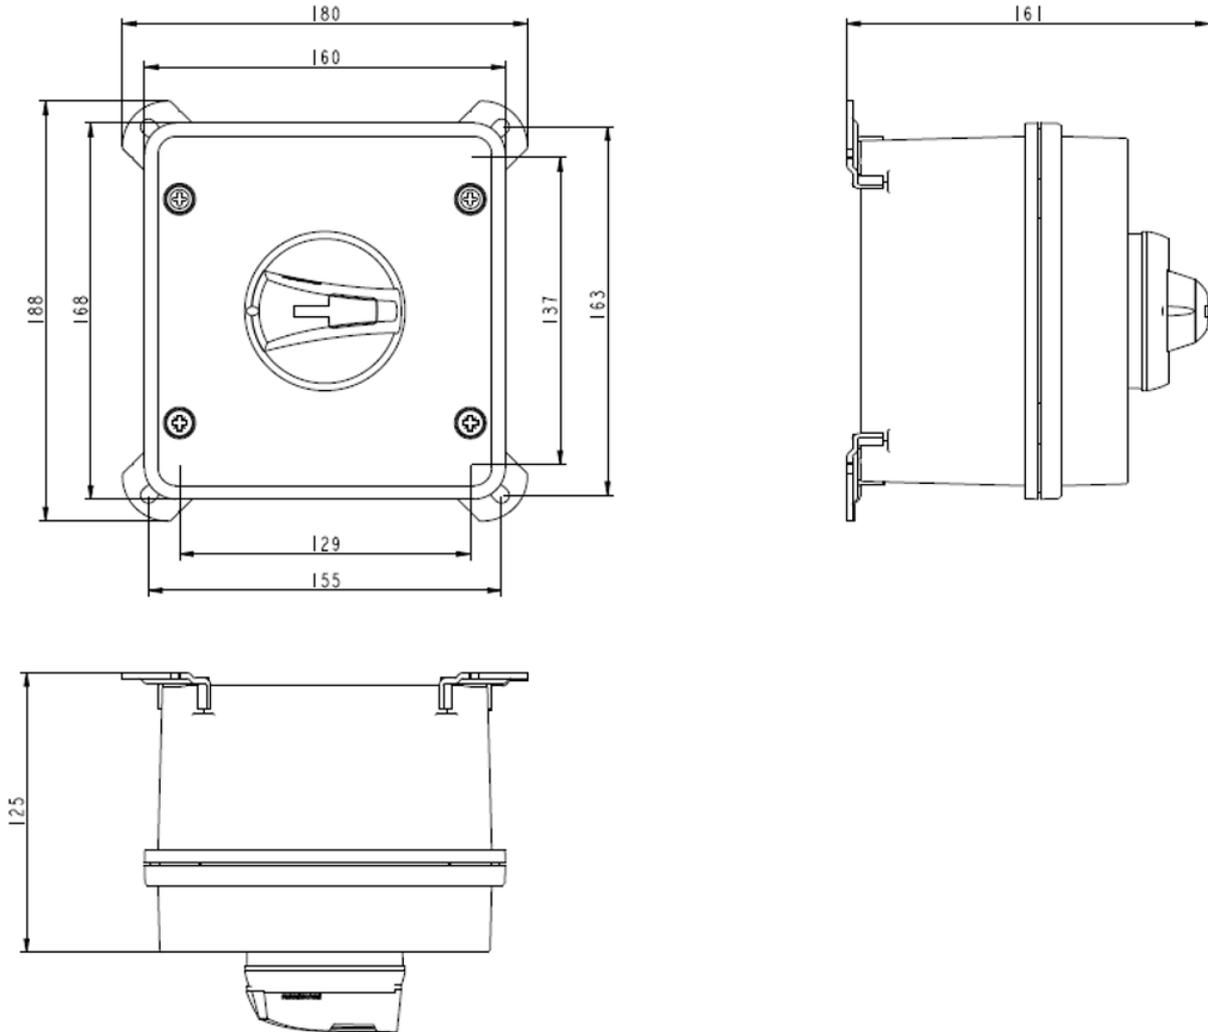

RELATED PRODUCTS

ACCESSORY



Item No: 22001001
Required: No
Description: Socomec SLBM Fourth Pole Module - Switched, 20A



Item No: 22001004
Required: No
Description: Socomec SLBM Fourth Pole Module - Switched, 40A



Item No: 22001006
Required: No
Description: Socomec SLBM Fourth Pole Module - Switched, 63A



Item No: 22001008
Required: No
Description: Socomec SLBM Fourth Pole Module - Switched, 80A

ISO325MYS

Socomec ISO Enclosed Isolator, IP 65 Aluminium Yellow,
Handle - Red, 3P 25A



ENCLOSED ISOLATORS

socomec
Innovative Power Solutions

RELATED PRODUCTS

ACCESSORY



Item No: 22001010

Required: No

Description: Socomec SLBM Fourth Pole Module - Switched, 100A



Item No: 22941005

Required: No

Description: Socomec SCOM/SLBM Terminal Shroud 1P, suits 16 - 40A (QTY 2)



Item No: 22943005

Required: No

Description: Socomec SCOM/SLBM Terminal Shroud 3P, suits 16 - 40A (QTY 2)



Item No: 22990001

Required: No

Description: Socomec SLBM Auxiliary Contact, 1 N.O + 1 N.C



Item No: 22990011

Required: No

Description: Socomec SLBM Auxiliary Contact, 2 N.O



Item No: 26990031

Required: No

Description: Socomec SLB Auxiliary Contact, 1 C.O, suits 1st Position 125 - 3200A



Item No: 26990032

Required: No

Description: Socomec SLB Auxiliary Contact, 1 C.O, suits 2st Position 125 - 3200A



Item No: NB160000

Required: No

Description: Socomec ISO Neutral Pole - Unswitched (Solid), suits 160A



Item No: NB250000

Required: No

Description: Socomec ISO Neutral Pole - Unswitched (Solid), suits 250A