
RFRXSW9152WRS232

Steute Wireless Universal Receiver 915MHz 24VACDC 2 Channel Relay Output RS232 Int

WIRELESS DEVICES

.steute

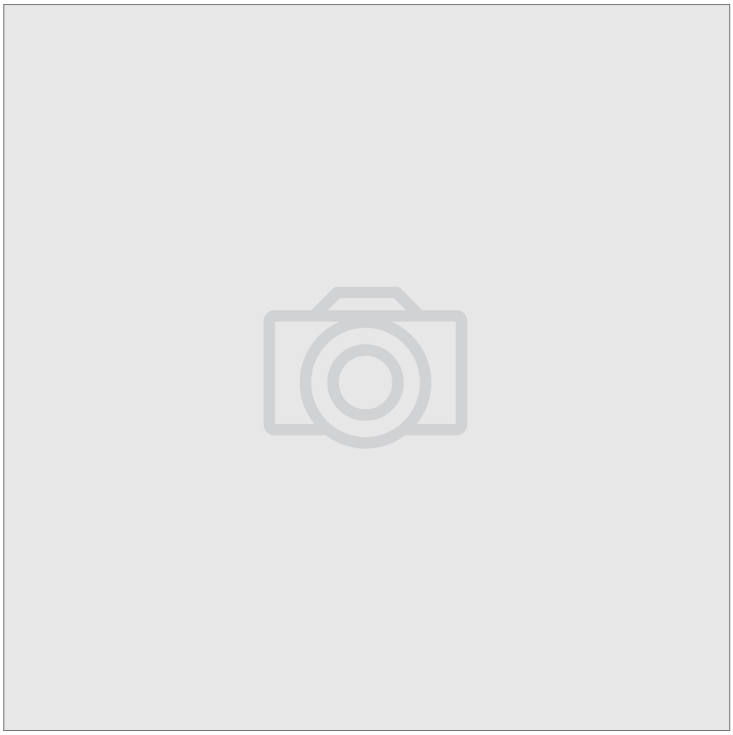

Component type	
Range	Wireless Receiver with Relay
Model	N/A
Alternative	CALL FOR ALTERNATIVE

Steute wireless receivers are easily mounted inside control cabinets located outside Ex zones capable of receiving and processing signals sent by wireless switching devices in the field. Available in various models suitable for top hat rail mounting in differing in switching outputs (one, two, or four). The range includes variants with RS-232 and TCP/IP gateways.

Published on 30 July 2026