1734OB8EK

Allen-Bradley POINT I/O 8-Point Digital Output Electronically Fused Source Module 24V DC Conf Coated

IN CABINET DISTRIBUTED IO



Component type	Fieldbus, decentr. periphery - analogue/digital I/O module
Range	Point I/O
Model	N/A
Product status	Existing

The Allen-Bradley POINT I/O™ family of modular I/O products offer digital, analogue, specialty, and safety-rated I/O modules, with one to eight points per module. The ability to mix standard and safety I/O in the same POINT I/O™ system provides great flexibility and opportunities for standardization, regardless of application requirements.

ELECTRICAL	Type of voltage (input voltage)	DC
	Supply voltage DC	24 V
CONSTRUCTION	Number of digital outputs	8
	Conformal coating	Yes
DIMENSIONS	Width	12.1 mm
	Height	77.5 mm
	Depth	56.6 mm
ENVIRONMENT	Operating temperature	-20…55 °C
	Storage temperature	-40…85 °C
	Max. ambient humidity (non-condensing)	95 %

Published on 02 November 2026

1734OB8EK

Allen-Bradley POINT I/O 8-Point Digital Output Electronically Fused Source Module 24V DC Conf Coated

IN CABINET DISTRIBUTED IO

DIMENSIONAL DIAGRAM

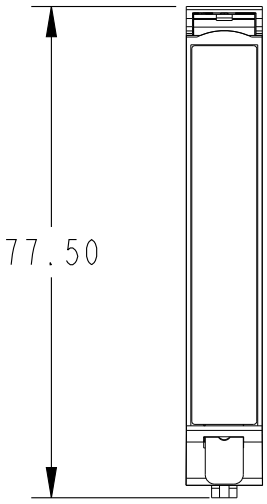

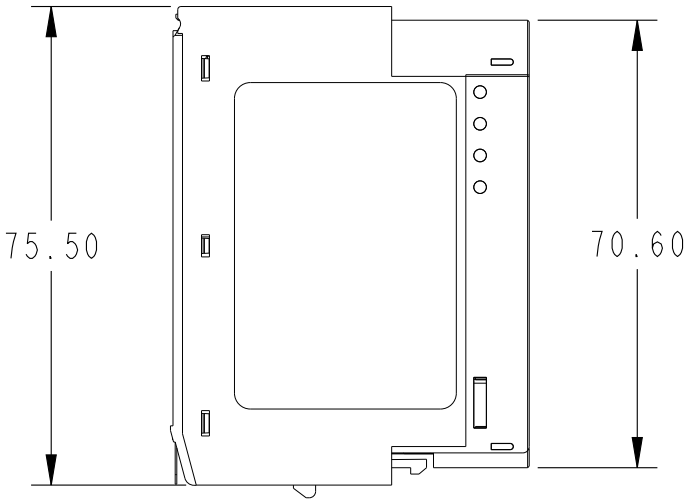

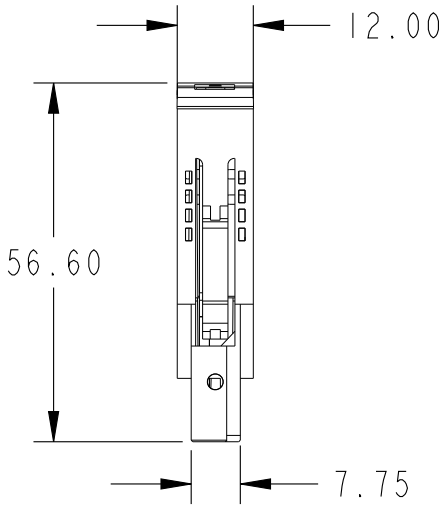

Published on 02 November 2026