

PBL4PRO46LM

Stanilite Single Point Platinum Batten IP44 1200mm Maintained
Pro 4600 Lumens



Stanilite®

Component type	Emergency luminaire
Range	Pro Platinum Battens
Model	N/A
Product status	New Item

The Stanilite batten range features an energy saving LED light source, efficient lithium power and is retrofittable to previous T8 profile installations.



- 4,600 lumen
- Self locating lanvard for ease of installation

- Large terminal block for quick and easy installation

ELECTRICAL	Operating mode	Maintained
	Nominal voltage	240 V
	Voltage type	AC
	Max. system power	39 W
	Nominal operation time	50000 h
COMMUNICATION	Monitoring equipment	Bluetooth
CONSTRUCTION	With remote switch connection	No
	With remote control	No
	Mounting method	Wall/ceiling/suspension
	With pictogram	No
	With light source	Yes
	Material housing	Steel
	Colour housing	White
	Material cover	Polycarbonate (PC)
MECHANICAL	IP rating	IP40
	Impact strength	IK06
PHOTOMETRIC	Lamp type	LED not exchangeable
	Photometric classification (C0)	D63
	Photometric classification	D40
DIMENSIONS	Width	80 mm
	Height/depth	65 mm
	Length	1200 mm
ENVIRONMENT	Rated ambient temperature according to IEC62722-2-1	0...40 °C

PBL4PRO46LM

Stanilite Single Point Platinum Batten IP44 1200mm Maintained
Pro 4600 Lumens




Stanilite®

CERTIFICATES/APPROVALS

Compliant to AS/NZS CISPR 15	Yes
Compliant to AS/NZS 2293.3:2018	Yes
Compliant to AS/NZS 60598.1:2017	Yes
Compliant to AS/NZS 60598.2.22:2005	Yes

DIMENSIONAL DIAGRAM

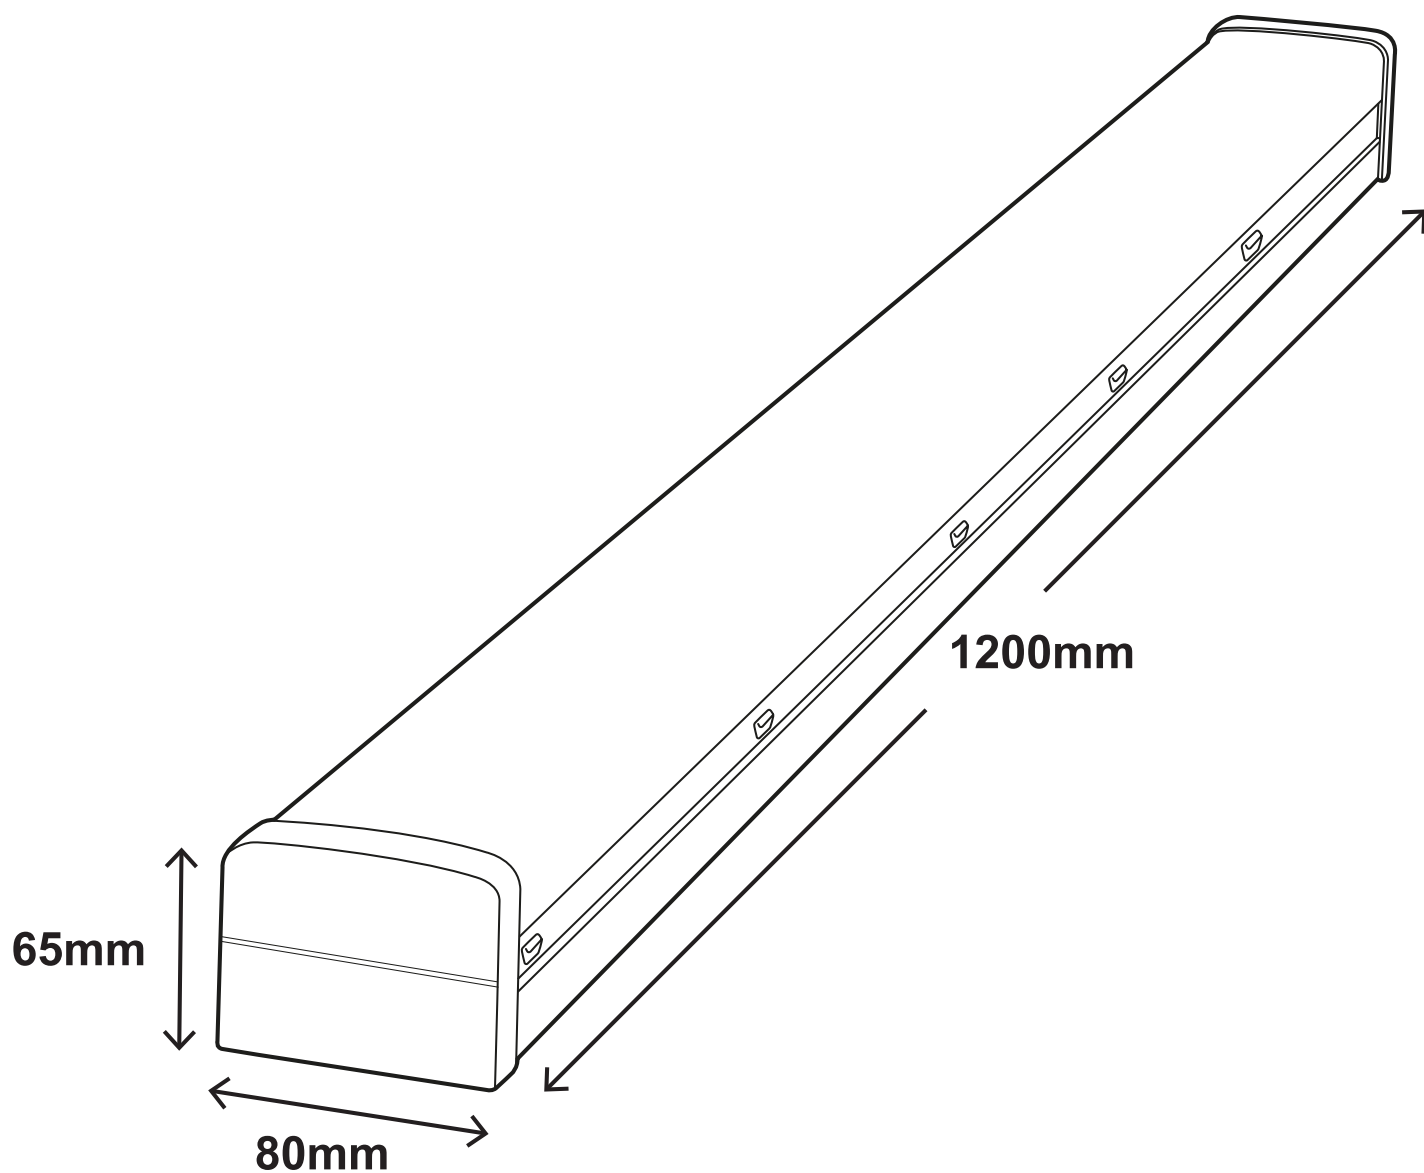

PBL4PRO46LM

Stanilite Single Point Platinum Batten IP44 1200mm Maintained
Pro 4600 Lumens



RELATED PRODUCTS

ACCESSORY



Item No: 0301307P

Required: No

Description: Stanilite Emergency Battery Pack
Lifepo4 Side By Side Bracket 2C 6.4V 3.2Ah
3WR