800FMSM22

Allen-Bradley 800F Selector Switch 22.5mm Head Only Metal STD Knob 2 POS Maint Black

PUSHBUTTON AND PILOT LIGHTS



Component type	Front element for selector switch
Range	800F Pushbutton
Model	N/A
Product status	Existing

The Allen-Bradley 800F line of operator control devices are a range of 22.5mm mount pushbuttons, pilot lights, selector switches, emergency stops for use in industrial applications requiring reliable performance. Available in plastic or metal types with a wide range of accessories including enclosures, legend plates, padlocks and colour caps making them suitable for use in various applications.

ELECTRICAL	Type of control element	Short thumb-grip
CONSTRUCTION	Colour control element	Black
	Colour indicator light cap	White
	Material front ring	Metal
	Colour front ring	Other
	Degree of protection (IP), front side	IP66
	With front ring	Yes
	Degree of protection (NEMA)	Other
MECHANICAL	Number of switch positions	2
	Switching function latching	Yes
	Spring-return	No
	Max. vibration acceleration	10 m/s²
	Max. vibration frequency, operational	2000 Hz
	Max. shock acceleration	100 g
	Mechanical life (service cycles)	1000000 cycles
PHOTOMETRIC	Suitable for illumination	No
DIMENSIONS	Hole diameter	22.5 mm
	Width opening	29.8 mm
	Height opening	27.9 mm
ENVIRONMENT	Operating temperature	-25…70 °C


Published on 20 October 2026

800FMSM22

Allen-Bradley 800F Selector Switch 22.5mm Head Only Metal STD Knob 2 POS Maint Black

PUSHBUTTON AND PILOT LIGHTS

DIMENSIONAL DIAGRAM

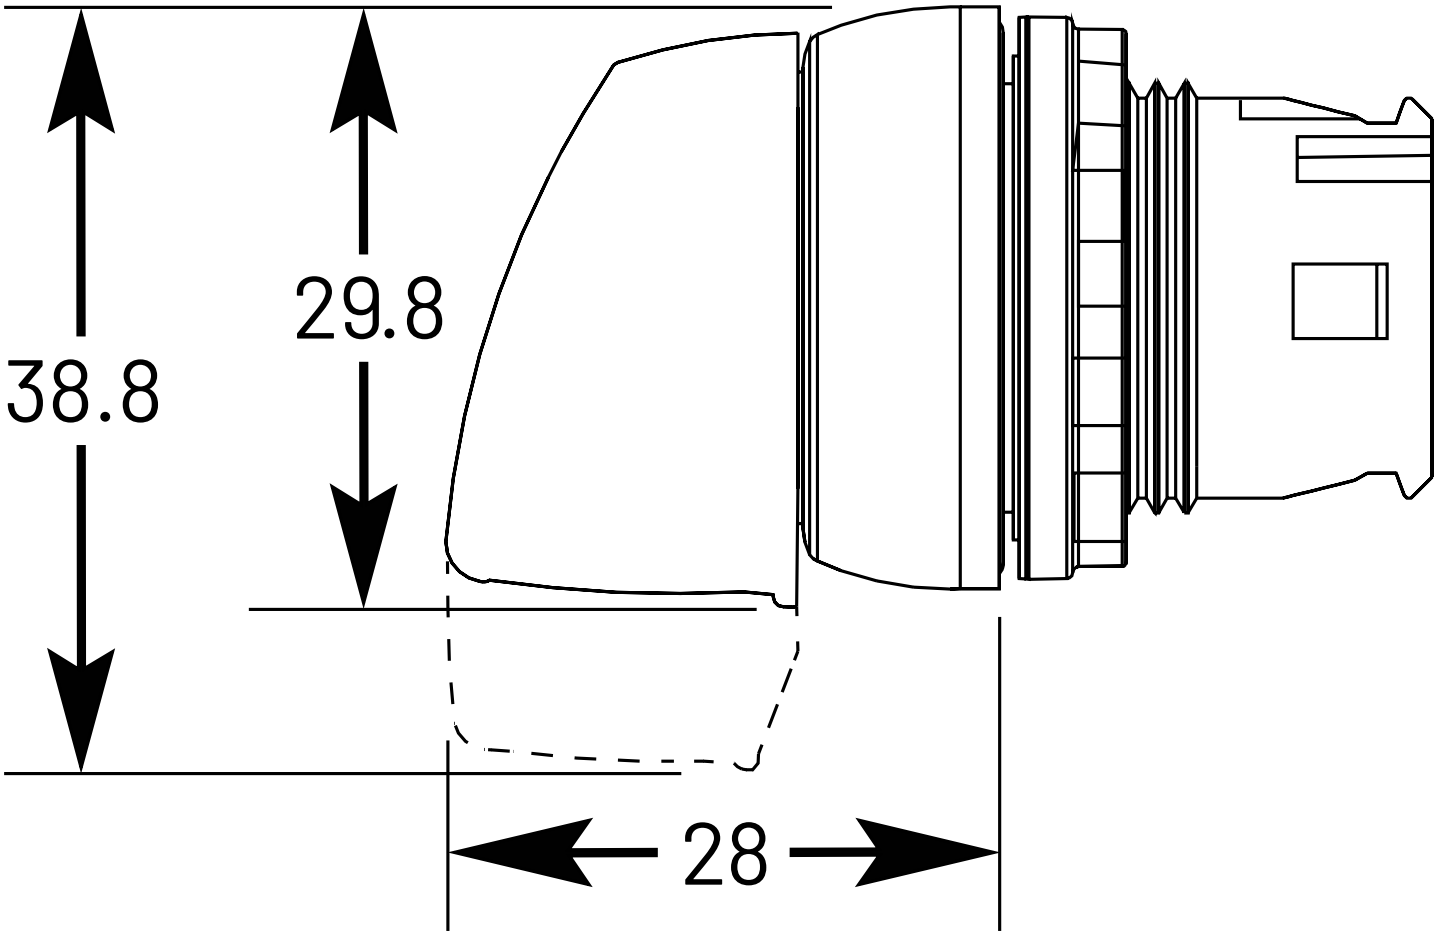

Dimensions are in millimeters.

Published on 20 October 2026

800FMSM22

Allen-Bradley 800F Selector Switch 22.5mm Head Only Metal STD Knob 2 POS Maint Black

PUSHBUTTON AND PILOT LIGHTS

RELATED PRODUCTS

ACCESSORY

Item No: 800FA6PR5

Required: No

Description: Allen-Bradley 800F Plastic Guard Yellow Round for E-stop Operators



Item No: 800FAL01

Required: No

Description: Allen-Bradley 800F Locking Cover



Item No: 800FASL2L

Required: No

Description: Allen-Bradley 800F Padlock Atttachment for 2 Position Selector Switches Left Lock Postion

Published on 20 October 2026