100E1260EY11

Allen-Bradley 100E Contactor 1260A AC-1 48-130V AC/DC Coil 1NO 1NC Auxiliary

CONTACTORS



Component type	Power contactor, AC switching
Range	100E
Model	N/A
Product status	Existing

The Allen-Bradley 100-E next-generation contactors are available in a range of sizes from 9 to 2650 A, reducing width and weight while maximising panel space. The universal electronic AC/DC coil makes selection easy and offers significant energy savings and direct connection to PLCs for contactors above 100 A.

ELECTRICAL	Number of normally open contacts as main contact	3
	Number of normally closed contacts as main contact	0
	Rated operation current Ie at AC-1, 400 V	1260 A
	Max. rated operation voltage Ue AC	1000 V
	Voltage type for actuating	AC/DC
	Rated control supply voltage Us at AC 50HZ	48-130 V
	Rated control supply voltage Us at DC	48-130 V
	Number of auxiliary contacts as normally open contact	1
	Number of auxiliary contacts as normally closed contact	1
	Rated control supply voltage Us at AC 60HZ	48-130 V
	Power consumption, AC coil pickup	1100 VA
	Power consumption, AC coil hold-in	12 VA
	Power consumption, DC coil pickup	1020 W
	Power consumption, DC coil hold-in	5 W
	Type of electrical connection of main circuit	Bolt connection
CONSTRUCTION	IP rating	IP00
	Mounting method	Screw mounting
DIMENSIONS	Height	344 mm
	Width	210 mm
	Depth	242 mm
	Weight	16 kg


Published on 13 October 2026

100E1260EY11

Allen-Bradley 100E Contactor 1260A AC-1 48-130V AC/DC Coil 1NO 1NC Auxiliary

CONTACTORS

DIMENSIONAL DIAGRAM

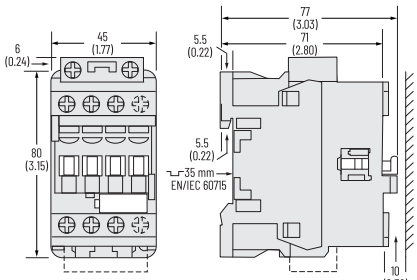


For contactors with QJ coils, add 20 mm (0.79 in.) to the depth.

Published on 13 October 2026

100E1260EY11

Allen-Bradley 100E Contactor 1260A AC-1 48-130V AC/DC Coil 1NO 1NC Auxiliary

CONTACTORS

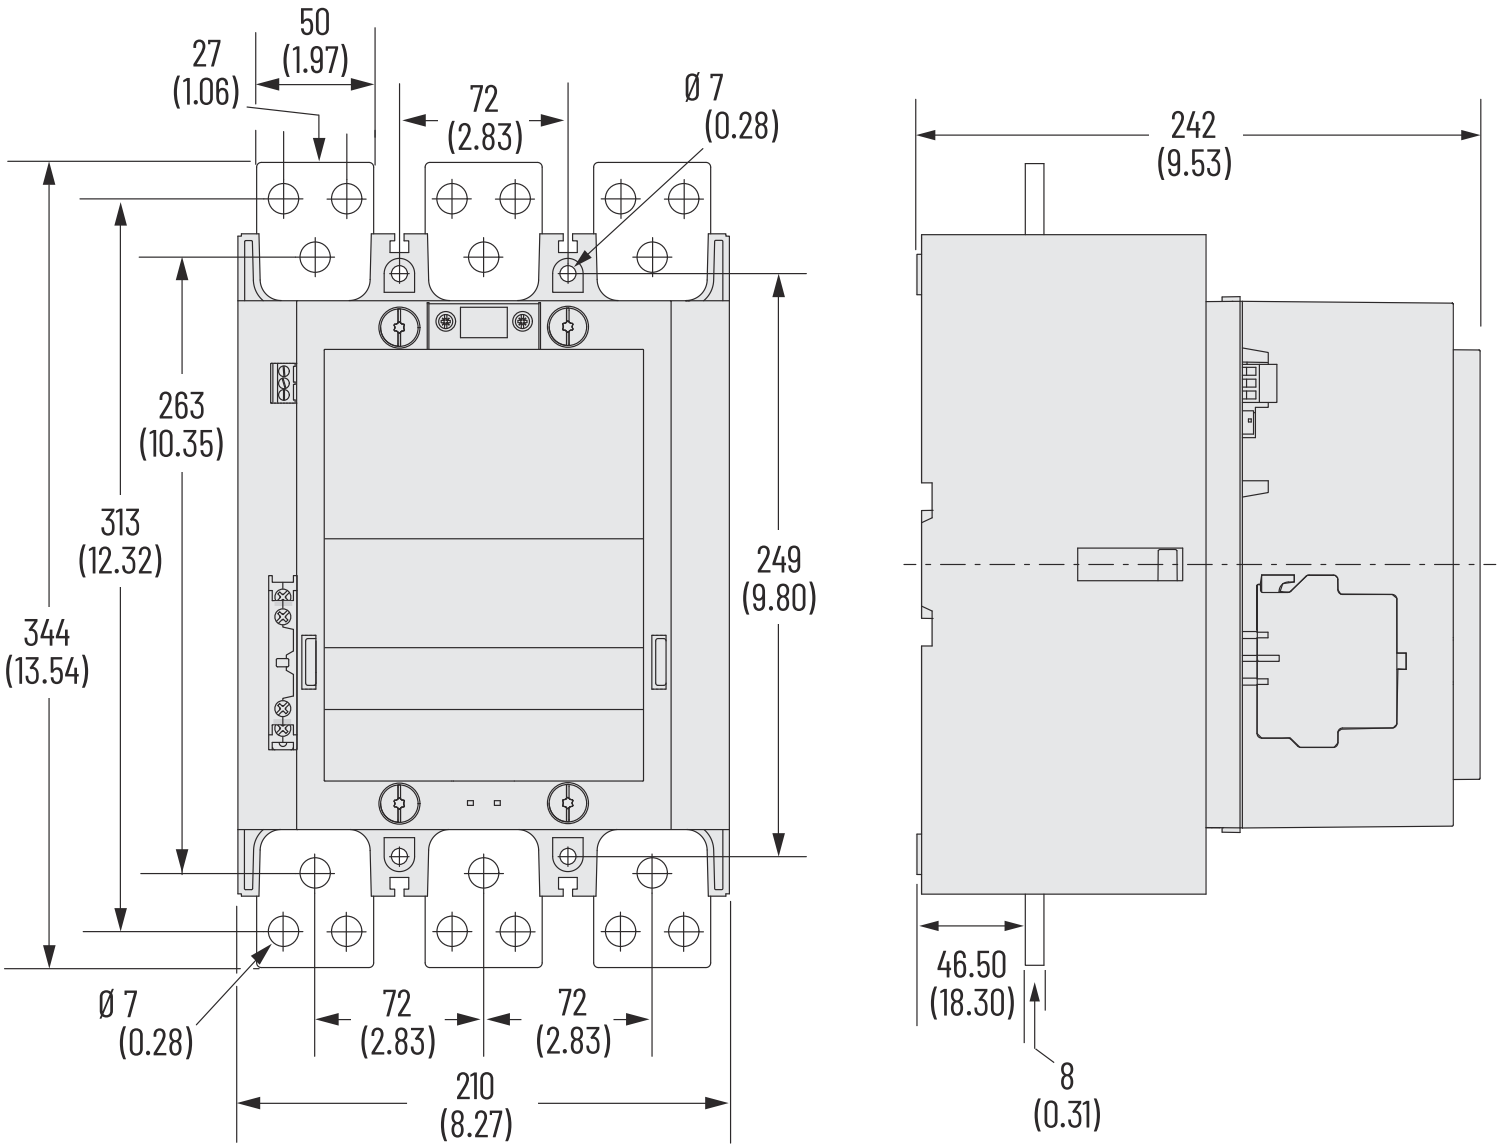

RELATED PRODUCTS

ACCESSORY



Item No: 100ECL146

Required: No

Description: Allen-Bradley 100E Terminal Lug Kit for 100E 116 to 146A



Item No: 100EFA01

Required: No

Description: Allen-Bradley Auxiliary Contact 1NC Front Mount To Suit 100-E09/96



Item No: 100EFA10

Required: No

Description: Allen-Bradley Auxiliary Contact 1NO Front Mount To Suit 100-E09/96



Item No: 100EM200

Required: No

Description: Allen-Bradley 100E Mechanical Interlock

Published on 13 October 2026

100E1260EY11

Allen-Bradley 100E Contactor 1260A AC-1 48-130V AC/DC Coil 1NO 1NC Auxiliary

CONTACTORS

RELATED PRODUCTS

ACCESSORY



Item No: 100ES311

Required: No

Description: Allen-Bradley 100E Auxiliary Contact with 1NO Contact and 1NC Contact



Item No: 100ES3B01

Required: No

Description: Allen-Bradley 100E Auxiliary Contact with 1NC Contact Low Power Inside Position Side Mount



Item No: 100ES3B10

Required: No

Description: Allen-Bradley 100E Auxiliary Contact with 1NO Contact Low Power Inside Position



Item No: 100ES411

Required: No

Description: Allen-Bradley 100E Auxiliary Contact with 1NO Contact and 1NC Contact Side Mount Outside Position