41532100

NHP Control Transformer 415V AC to 32V AC 100VA

ELECTRICAL ENGINEERING PRODUCTS

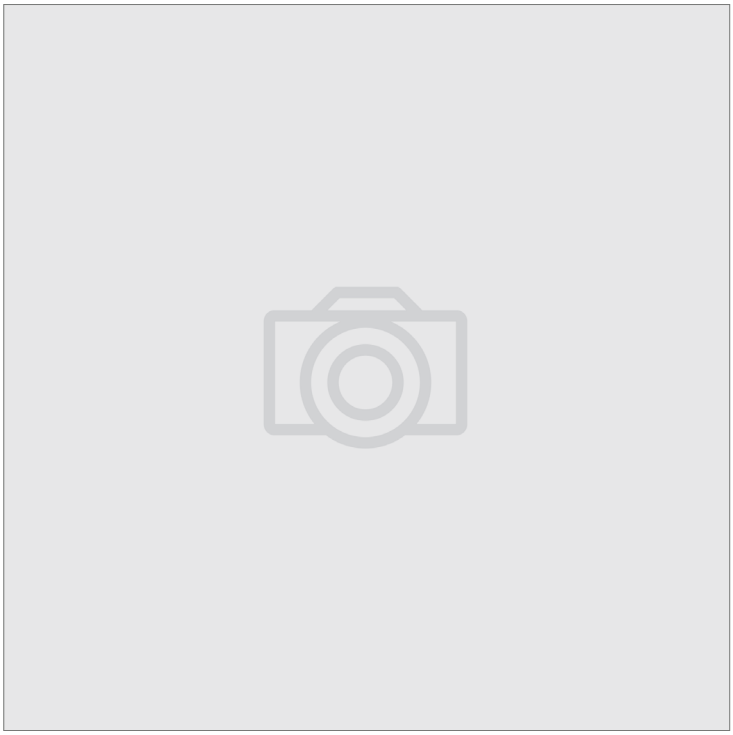

Component type	One-phase control transformer
Range	Control Transformer
Model	N/A
Product status	Existing

The NHP range of low voltage control transformers are designed for adjusting down the supply voltage to a voltage level suitable for control equipment. Available in a range of step-down voltages, Volt-Ampere (VA) options and between both single and multi-tap voltage variants.

ELECTRICAL	**Primary voltage 1**	415 V
	Secondary voltage 1	32 V
	Rated apparent power	100 VA
	Type of insulation material according to IEC 85	F
	Type of electric connection	Screw connection
CONSTRUCTION	**Suitable for mounting on PCB**	No
	Modular version	No
DIMENSIONS	**Width**	72 mm
	Height	98 mm
	Depth	95 mm
	Weight	2.08 kg

Published on 14 January 2026