TOH40

NHP Control Transformer Multi Tap 40VA 415 to 240VAC Dual Input and 24 to 12VAC Output

ELECTRICAL ENGINEERING PRODUCTS



Component type	One-phase control transformer
Range	Control Transformer
Model	N/A
Product status	Existing

The NHP range of low voltage control transformers are designed for adjusting down the supply voltage to a voltage level suitable for control equipment. Available in a range of step-down voltages, Volt-Ampere (VA) options and between both single and multi-tap voltage variants.

ELECTRICAL	**Primary voltage 1**	240 V
	Primary voltage 2	415 V
	Secondary voltage 1	12 V
	Secondary voltage 2	24 V
	Rated apparent power	40 VA
	Type of insulation material according to IEC 85	F
	Type of electric connection	Screw connection
CONSTRUCTION	**Suitable for mounting on PCB**	No
	Modular version	No
DIMENSIONS	**Width**	76 mm
	Height	56 mm
	Depth	85 mm
	Weight	0.84 kg


Published on 01 October 2026

TOH40

NHP Control Transformer Multi Tap 40VA 415 to 240VAC Dual Input and 24 to 12VAC Output

ELECTRICAL ENGINEERING PRODUCTS

ELECTRICAL CONNECTION DIAGRAM

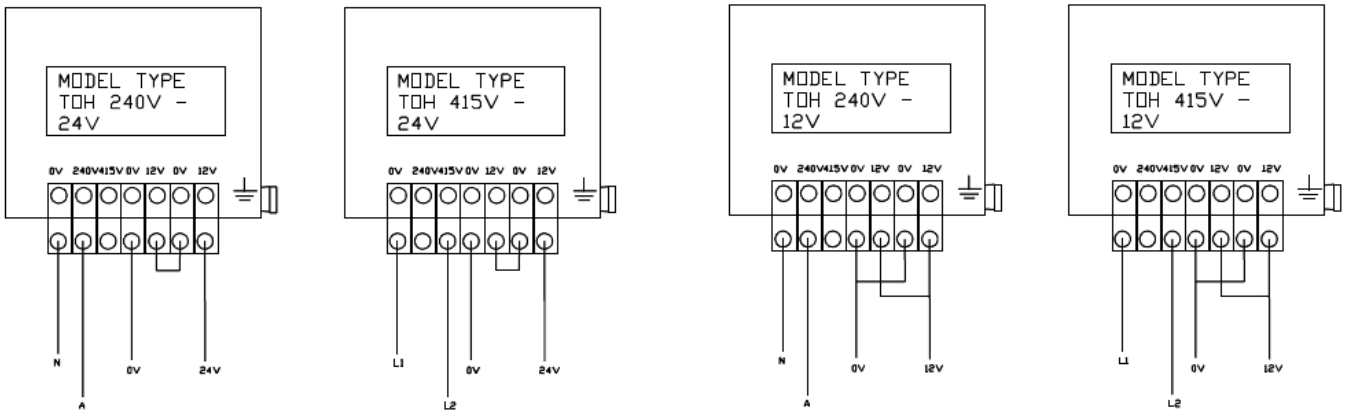

Published on 01 October 2026