3921230VAC

Finder 39 Series Master Output Relay Interface Module 6A 240V AC Coil 1 NO Contact

GENERAL PURPOSE RELAYS



Component type	Switching relay
Range	Solid State Relay
Model	N/A
Product status	Phased Out

The Finder Solid State PCB and Interface Relays offer reliability and performance for industrial and commercial applications. With advanced semi-conductor technology, high-speed switching, low power consumption and resistance to generating electrical noise. Options include width sizes, AC or DC coil, special coil or input leakage current suppression types, timer version and switching up to 6A.

ELECTRICAL	Nominal current	6 A
	Nominal voltage AC	250 V
	Max. rated operation voltage Ue AC	400 V
	Number of contacts as change-over contact	1
	Drive, switching attitude	Mono stable
	Rated switching power at AC-1	1500 VA
	Rated switching power at AC-15, 230V	300 VA
	Breaking capacity at DC-1, 30V	6 A
	Breaking capacity at DC-1, 110V	0.2 A
	Voltage type for actuating	AC
	Control supply voltage Us at AC 50HZ	230 V
	Control supply voltage Us at AC 60HZ	230 V
	With LED indication	Yes
	Type of electric connection	Screw connection
	Electrical life at Un, In (service cycles)	60000 cycles
	Drive, polarization	Polarity free
	Type of switch contact	Single contact
	Material of contact insert	Thermoplastic
	Operating voltage	184-264 V
CONSTRUCTION	Material contact	Silver nickel
	Complete with socket	Yes
	Suitable for DIN rail mounting	Yes
	IP rating	IP20
MECHANICAL	Mechanical life (service cycles)	1.0E7 cycles
	Max. shock duration	1 ms
	Max. vibration acceleration	10 m/s²

Published on 29 October 2026

3921230VAC

Finder 39 Series Master Output Relay Interface Module 6A 240V AC Coil 1 NO Contact

GENERAL PURPOSE RELAYS

MECHANICAL	Max. vibration frequency, operational	55 Hz
DIMENSIONS	Width	6.2 mm
	Height	87 mm
	Depth	90.7 mm
ENVIRONMENT	Operating temperature	-40…70 °C

3921230VAC

Finder 39 Series Master Output Relay Interface Module 6A 240V AC Coil 1 NO Contact

GENERAL PURPOSE RELAYS

DIMENSIONAL DIAGRAM

39.20
39.21
Screw terminal





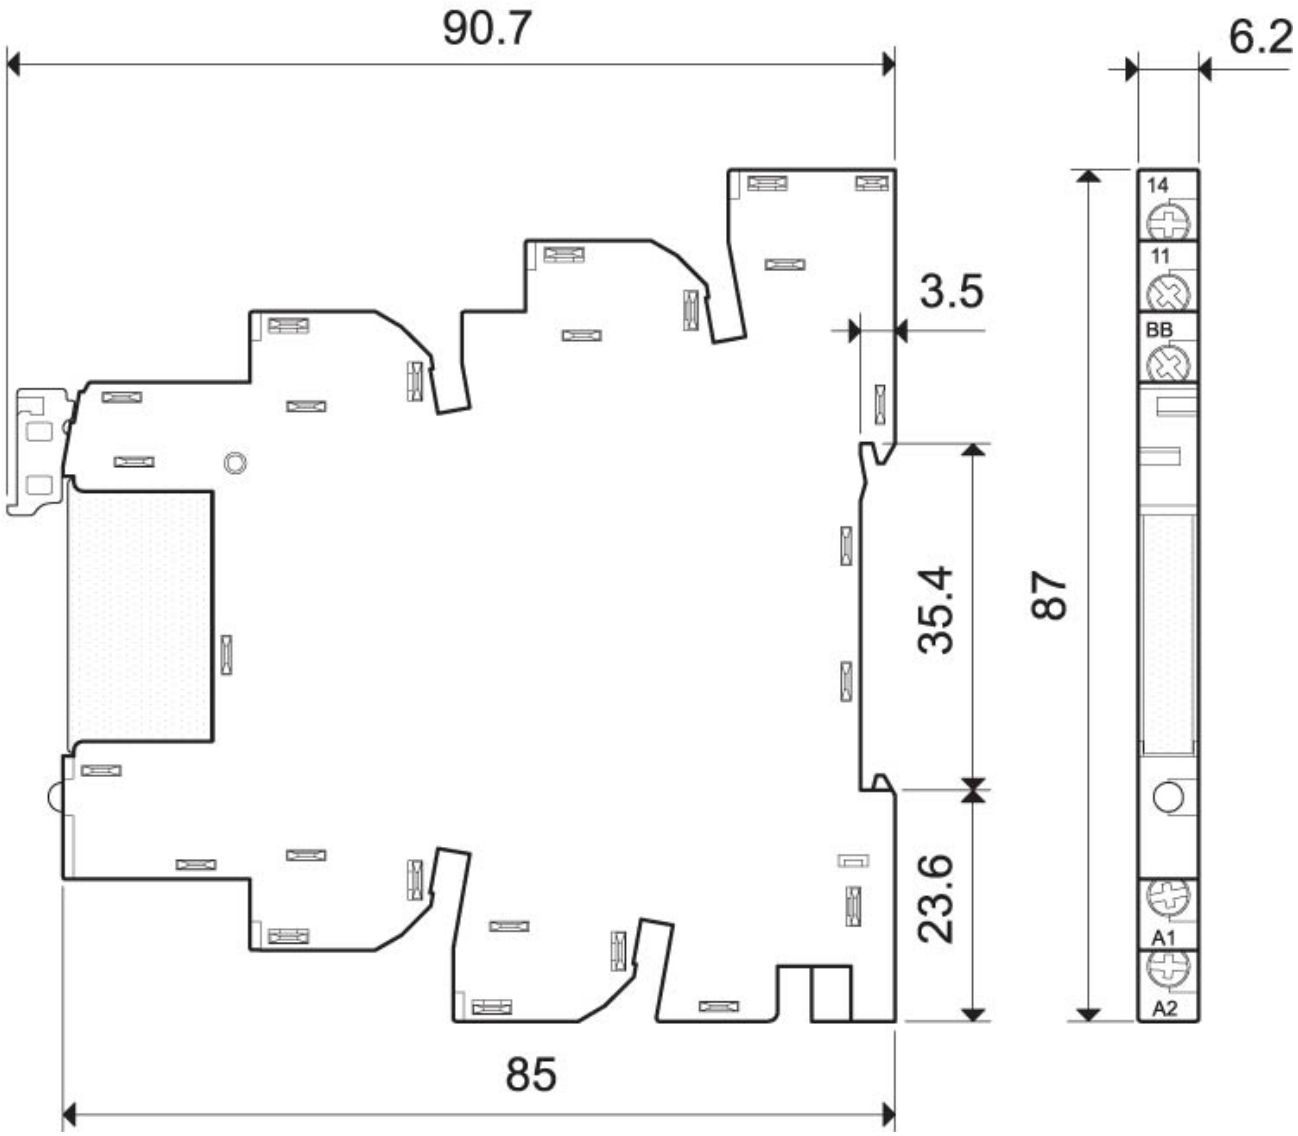

Published on 29 October 2026