

MOD6 3P+N RCBO


NHP

Easy upgrade from 3P MCB to RCBO

- AS/NZS 61009 
- Compact 3P 54mm width
- 6kA Type A
- 6A – 63A C Curve
- 30mA
- Suits Concept One Panelboards



MOD6 3P+N RCBO

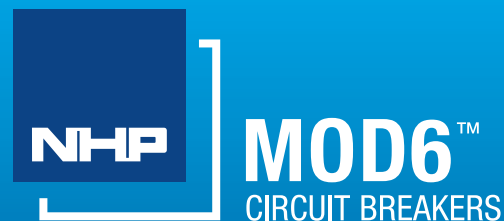

- Compact, same width as 3P MCB 54mm
- Suitable for NHP Concept One Panelboards
- Genuine 6kA short circuit protection
- 30mA sensitivity
- Type A
- C Curve overcurrent protection
- Toggle free operation
- Lead Sealable
- Pad lockable (removeable accessory)

Locking Device



Cat: DTLD
Non Captive Lock

Description	30mA Cat. No.
06A 3P+N RCBO	M6RCBT0630A
10A 3P+N RCBO	M6RCBT1030A
16A 3P+N RCBO	M6RCBT1630A
20A 3P+N RCBO	M6RCBT2030A
25A 3P+N RCBO	M6RCBT2530A
32A 3P+N RCBO	M6RCBT3230A
40A 3P+N RCBO	M6RCBT4030A
50A 3P+N RCBO	M6RCBT5030A
63A 3P+N RCBO	M6RCBT6330A

Description	Rating
RCD Type	A
Rated Voltage (U_e)	400 / 415 V
Insulation voltage (U_i)	500 V
Impulse withstand voltage (1.2/50) U_{imp}	4 kV
Rated Frequency (Hz)	50 / 60
Rated Short circuit Current (I_{cn})	6 kA
Rated residual breaking capacity ($I_{\Delta m}$)	6 kA
Tightening Torque	2.5 Nm
Terminal size (Top/bottom)	25mm ² / 25mm ² rigid cable
Neutral Pigtail	>900mm
IP Rating, inside/outside	IP4X / IP2X

Compact Dimensions

