
## 440ED13118

Allen-Bradley 440E Lifeline 3 Pullwire IP67 30m Auxiliary 2 NO Safety 2 NC M20



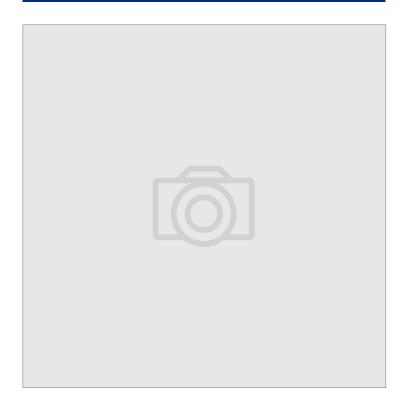

| Component type | Emergency stop pull cord switch |  |
|----------------|---------------------------------|--|
| Range          | Lifeline 3                      |  |
| Model          | N/A                             |  |
| Product status | Existing                        |  |

The Allen-Bradley Lifeline 3 Cable Pull Wire Switches are cable (rope) operated E-stop devices designed to meet the requirements of ISO 13850 and are installed along or around awkward machinery, providing a constant-access E-stop facility.

|              | Number of contacts as normally open contact   | 2.0           |
|--------------|---|---------------|
| ELECTRICAL   | Number of contacts as normally closed contact | 2.0           |
|              | Rated insulation voltage Ui                   | 500.0 V       |
|              | Rated operation current le at AC-15, 120 V    | 6.0 A         |
|              | Rated operation current le at AC-15, 240 V    | 3.0 A         |
|              | Rated operation current le at AC-15, 600 V    | 1.2 A         |
| CONSTRUCTION | Rated operation current le at DC-13, 24 V     | 2.0 A         |
|              | Emergency stop button                         | No            |
|              | Material housing                              | Zinc die-cast |
|              | Colour  | Yellow        |
| DIMENSIONS   | Degree of protection (IP)                     | IP67          |
|              | Height  | 204.0 mm      |
|              | Width   | 40.0 mm       |
|              | Depth   | 56.0 mm       |
|              | Weight  | 0.61 mm       |
| ENVIRONMENT  | Ambient temperature                           | -25 - 80 °C   |
|              |   |               |