
140MTCASA02

Allen-Bradley 140MT Auxiliary Contact with 2NC Contact Right Hand Side Mount

MOTOR PROTECTION

NHP Allen-Bradley

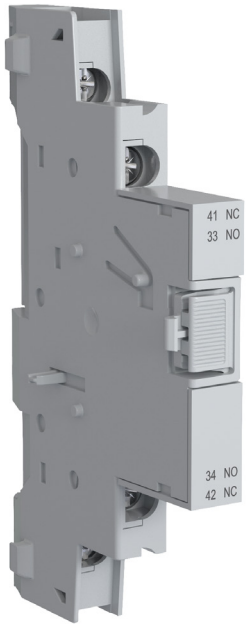

Component type	Auxiliary contact block
Range	140MT
Model	N/A
Product status	Existing

The Allen-Bradley Bulletin 140MT Motor Protection Circuit Breakers provide magnetic short-circuit and thermal overload protection up to 40A. Assembled starters can be applied without additional branch circuit protection. Motor circuit protectors are applied with a separate overload relay for three-component starters, available in two frame sizes.

ELECTRICAL	**Number of contacts as normally closed contact**	2
	Rated insulation voltage Ui	690 V
	Rated operation current Ie at AC-15, 24 V	6 A
	Rated operation current Ie at AC-15, 120 V	5 A
	Rated operation current Ie at AC-15, 240 V	3 A
	Rated operation current Ie at AC-15, 400 V	2 A
	Rated operation current Ie at DC-13, 24 V	2 A
	Rated operation current Ie at DC-13, 125 V	0.55 A
	Rated operation current Ie at DC-13, 250 V	0.27 A
CONSTRUCTION	**Mounting method**	Side mounting

RELATED PRODUCTS

ACCESSORY



Item No: 140MCPEC23

Required: No

Description: Allen-Bradley 140M Connecting Link 140MC to 100C 09 to 23

Published on 02 October 2026