# NTF125

**Mersen BS Fuse gG Size B2 111mm Centres 690V AC 125A**

PANELBOARDS
MODULAR




| | |
|---|---|
| **Component type** | HRC fuse |
| **Range** | BS Fuses |
| **Model** | N/A |
| **Product status** | Existing |

NHP's British Standard (BS) Fuses offer a reliable and cost-effective solution for protecting electrical systems against overcurrent and short-circuit faults. The NHP BS Fuses conform to BS 88, which sets out requirements for the design, performance, and testing of fuses used in electrical systems in the UK and wider geographies.

| | | |
|---|---|---|
| **ELECTRICAL** | **Type of current** | AC |
| | **Rated voltage AC** | 500 V |
| | **Utilization category** | gL/gG (cable protection/equipment protection) |
| | **Breaking capacity** | 80 kA |
| **CONSTRUCTION** | **Fuse construction type according to IEC 60269** | B2 |
| **DIMENSIONS** | **Centre-to-centre distance of connections** | 111 mm |
| | **Height** | 131.5 mm |
| | **Width** | 39.5 mm |
| | **Depth** | 39.5 mm |




Published on 19 June 2026

# NTF125

**Mersen BS Fuse gG Size B2 111mm Centres 690V AC 125A**

PANELBOARDS
MODULAR

## DIMENSIONAL DIAGRAM

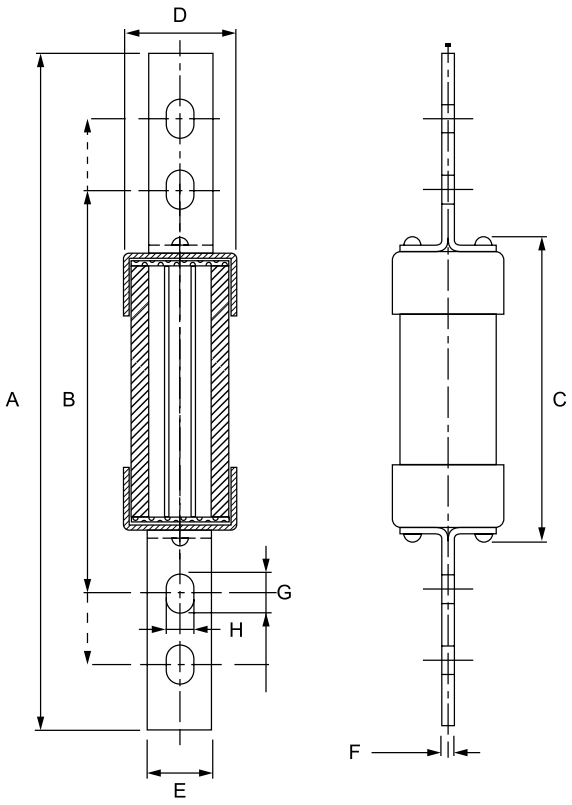


| Series | Category | Brand | A Overall Length | B Fitting Centres | C Body Length | D Body Diameter | E Tag Width | F Tag Thickness | G Hole Length | H Hole Width |
|---|---|---|---|---|---|---|---|---|---|---|
| **NTBC 2 – 40** | B1 | FuseMaster | 137 | 111 | 45 | 22 | 15 | 1.4 | 14 | 8.7 |
| **NTBC 50 – 63** | B1 | FuseMaster | 135 | 111 | 65 | 31.8 | 17 | 3.2 | 11 | 8.7 |
| **NTBC 63M** | B1 | Lawson | 137 | 111 | 45 | 26 | 20 | 3.2 | 14 | 8.7 |
| **NTC 80 – 100** | B1 | FuseMaster | 135.5 | 111 | 65 | 31.8 | 17 | 3.2 | 11 | 8.7 |
| **NTC 100M** | B1 | Lawson | 137 | 111 | 45 | 35 | 20 | 3.2 | 14 | 8.7 |
| **NTF 125 – 200** | B2 | FuseMaster | 131.5 | 111 | 72 | 39.5 | 19 | 3.2 | 11 | 8.7 |
| **NTF 200M** | B2 | Lawson | 137 | 111 | 45 | 41 | 20 | 3.2 | 14 | 8.7 |
| **NTKF250S** | B3 | EATON | 135.5 | 111 | 70 | 40 | 25.4 | 3.2 | 11 | 8.7 |
| **NTKF 250 - 315** | B3 | FuseMaster | 135.5 | 111 | 70 | 50.5 | 25.4 | 3.2 | 11 | 8.7 |
| **NTKF 315M** | B3 | Lawson | 137 | 111 | 45 | 51 | 26 | 6.4 | 14 | 8.7 |
| **NTKM 250 – 355** | B4 | FuseMaster | 136.5 | 111 | 72 | 41 | 25.4 | 5.3 | 11 | 8.7 |
| **NTMF 355 - 400** | B4 | FuseMaster | 137 | 111 | 52 | 50.5 | 26 | 6.4 | 16 | 8.7 |



Published on 19 June 2026