NTFP200M250

Mersen BS Fuse gG Hybrid A4 94mm Centres 200M250 Motor Start 415V AC 200A

PANELBOARDS
MODULAR



Component type	HRC fuse
Range	BS Fuses
Model	N/A
Product status	Existing

NHP's British Standard (BS) Fuses offer a reliable and cost-effective solution for protecting electrical systems against overcurrent and short-circuit faults. The NHP BS Fuses conform to BS 88, which sets out requirements for the design, performance, and testing of fuses used in electrical systems in the UK and wider geographies.

ELECTRICAL	Type of current	AC
	Rated voltage AC	415 V
	Utilization category	gM (motor protection)
	Breaking capacity	80 kA
CONSTRUCTION	Fuse construction type according to IEC 60269	A4
DIMENSIONS	Centre-to-centre distance of connections	94 mm
	Height	110 mm
	Width	41 mm
	Depth	41 mm


Published on 19 June 2026

NTFP200M250

Mersen BS Fuse gG Hybrid A4 94mm Centres 200M250 Motor Start 415V AC 200A

PANELBOARDS
MODULAR

DIMENSIONAL DIAGRAM

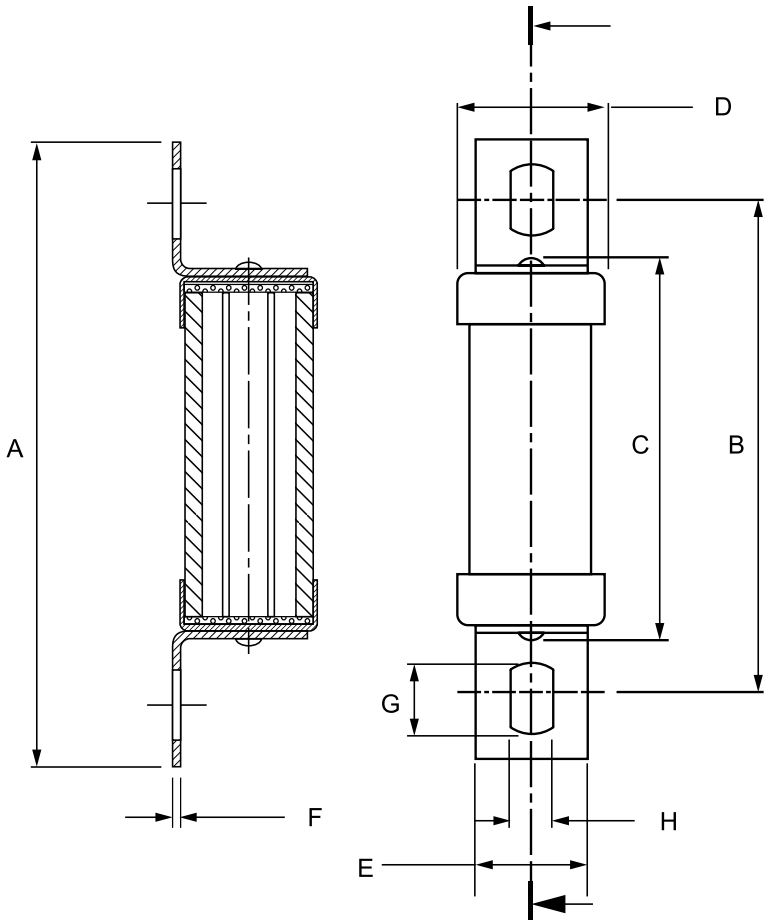

Series	Category	Brand	A Overall Length	B Fitting Centres	C Body Length	D Body Diameter	E Tag Width	F Tag Thickness	G Hole Length	H Hole Width
NTCP 20 – 40	A4	FuseMaster	110	94	51	22	20	2.4	11	8.7
NTCP 50 – 100	A4	FuseMaster	110	94	64.5	31.8	17	2.4	10	8.7
NTCP 125 – 160	A4	Mersen	110	94	64.5	26.9	17	2.4	10	8.7
NTCP 100M	A4	Lawson	110	94	51	35	20	2.4	11	8.7
NTFP 125 – 200	as A4	FuseMaster	110	94	73.5	39.5	19	2.4	11	8.7
NTFP 200M	as A4	Lawson	110	94	51	41	20	2.4	11	8.7

Published on 19 June 2026