PBLWEM46LM

Stanilite Single Point Platinum Batten LED IP65 EM 4600 Lumens Maintained



Component type	Emergency luminaire
Range	Single Point Platinum Batten
Model	N/A
Alternative	CALL FOR ALTERNATIVE

The Stanilite single point platinum batten range features larger terminals for faster installation, efficient lithium power and retrofittable to previous T8 profile installations.

ELECTRICAL	Operating mode	Maintained
	Nominal voltage	240 V
	Voltage type	AC
	Max. system power	39.5 W
	Nominal operation time	75000 h
	Driver type	LED
CONSTRUCTION	With remote switch connection	No
	With remote control	No
	Mounting method	Wall/ceiling/suspension
	With pictogram	No
	With light source	Yes
	Material housing	Polycarbonate (PC)
	Colour housing	Grey
	Material cover	Polycarbonate (PC)
	IP rating	IP65
MECHANICAL	Impact strength	IK08
PHOTOMETRIC	Lamp type	LED not exchangeable
	Photometric classification (C0)	D80
	Photometric classification	D63
DIMENSIONS	Width	140 mm
	Height/depth	90 mm
	Length	1260 mm
ENVIRONMENT	Rated ambient temperature according to IEC62722-2-1	0…40 °C
CERTIFICATES/APPROVALS	Compliant to AS/NZS CISPR 15	Yes
	Compliant to AS/NZS 2293.3:2018	Yes


Published on 17 April 2026

PBLWEM46LM

Stanilite Single Point Platinum Batten LED IP65 EM 4600 Lumens Maintained

CERTIFICATES/APPROVALS		
	Compliant to AS/NZS 60598.1:2017	Yes
	Compliant to AS/NZS 60598.2.22:2005	Yes

DIMENSIONAL DIAGRAM

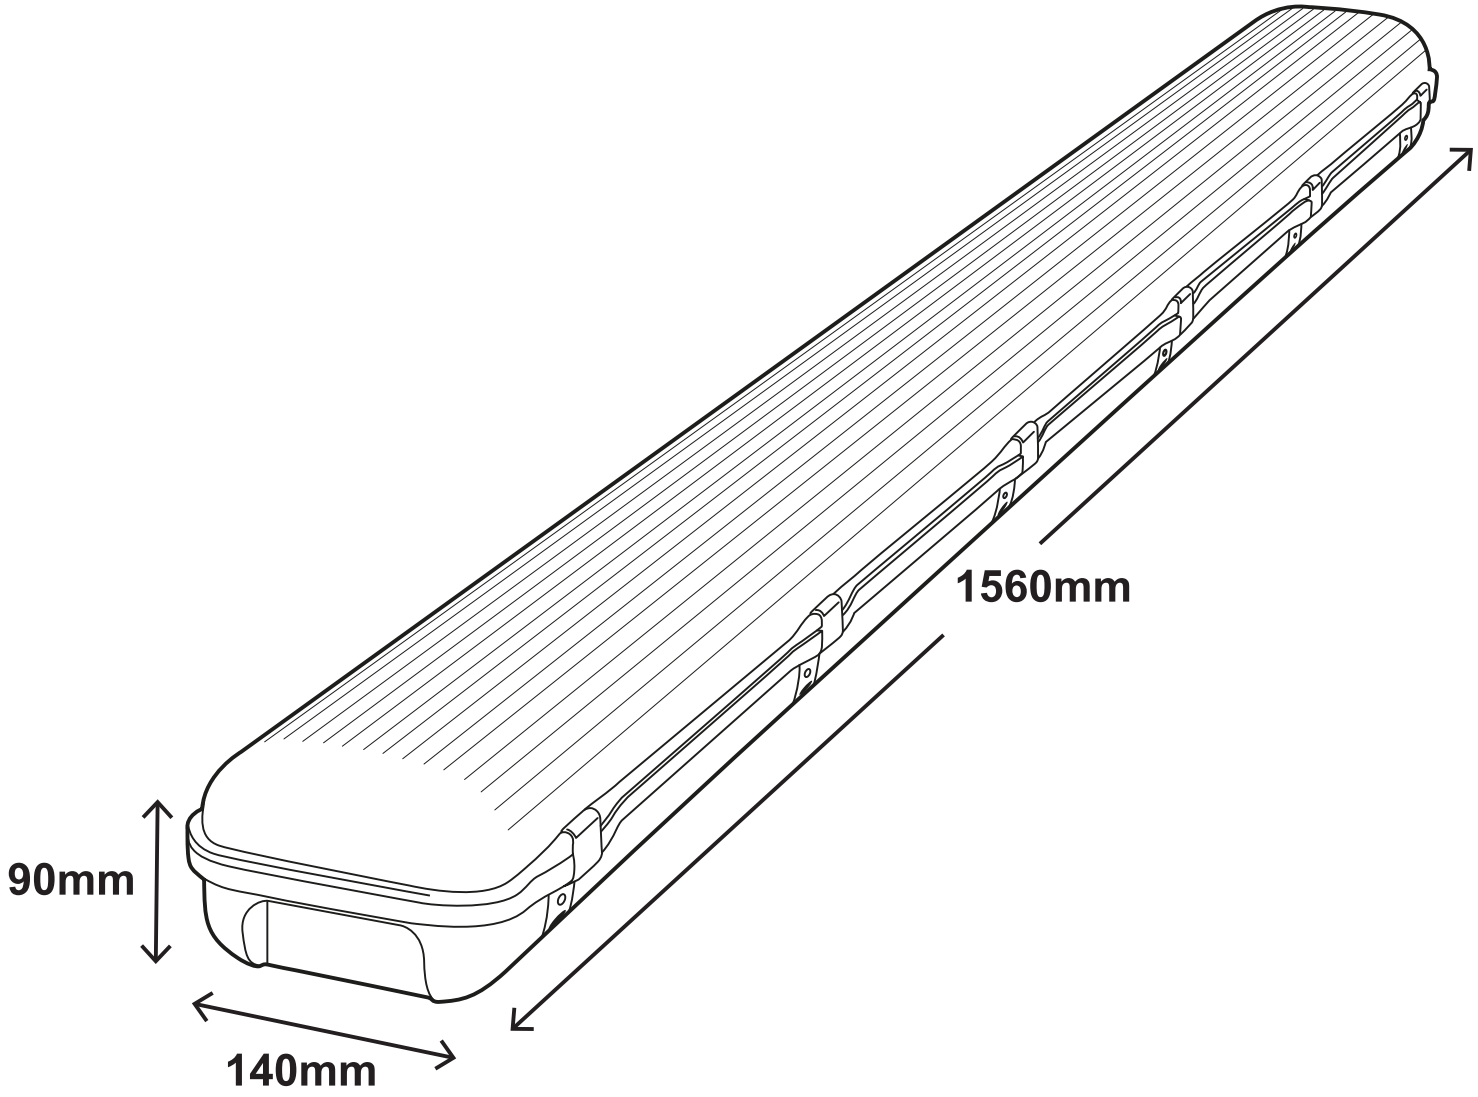

RELATED PRODUCTS

ACCESSORY



Item No: 0301307P

Required: No

Description: Stanilite Emergency Battery Pack Lifepo4 Side By Side Bracket 2C 6.4V 3.2Ah 3WR

Item No: 21PCCSBLW

Required: No

Description: Stanilite Emergency Diffuser Signature Batten Series Polycarbonate Clips

RELATED PRODUCTS

ACCESSORY



Item No: 26PBMD001
Required: No
Description: Stanilite Emergency Accessories Wall Mount Bracket Pair 45 Degree

Item No: PBLWSS316KIT
Required: No
Description: Stanilite Emergency Accessories Marine Grade Accessory Kit Batten IP65 Stainless Steel 316