RGC1A23A40KGE

Carlo Gavazzi Solid State Relay 40A 24 to 240V AC Switching 20 to 275V AC 24 to 190V DC Clamp

GENERAL PURPOSE RELAYS



Component type	Solid state relay
Range	Solid State Relay
Model	N/A
Alternative	CALL FOR ALTERNATIVE

The Carlo Gavazzi Solid State Relays (SSR) are ideal for a wide range of applications including AC and DC switching, 1-phase and 3-phase and temperature control. With fast switching capability, they are the most reliable switching components for process accuracy. A wide range of accessories available such as heatsinks, terminal adaptors, protection covers, communication and thermal interfaces.

ELECTRICAL	Rated current In	40 A
	Rated control supply voltage Us at AC 50HZ	20-275 V
	Rated control supply voltage Us at AC 60HZ	20-275 V
	Rated control supply voltage Us at DC	21.6-190 V
	Voltage type for actuating	AC/DC
	Operating voltage	24-264 V
	Number of contacts as normally open contact	1
	Rated operation current Ie at AC-1	0 A
	Rated operation current Ie at AC-3	0 A
	Rated operation current Ie at AC-51	40 A
	Rated operation current Ie at AC-53a	13 A
	Rated operation current Ie at AC-53b	0 A
	Switching at zero-crossing	Yes
	Number of phases	1
CONSTRUCTION	IP rating	IP20
	Modular version	Yes
DIMENSIONS	Height	110 mm
	Width	35.6 mm
	Depth	140.5 mm
	Weight	0.52 kg

Published on 10 November 2026

RGC1A23A40KGE

Carlo Gavazzi Solid State Relay 40A 24 to 240V AC Switching 20 to 275V AC 24 to 190V DC Clamp

GENERAL PURPOSE RELAYS

DIMENSIONAL DIAGRAM

RGC...40KGE

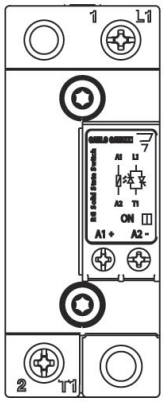

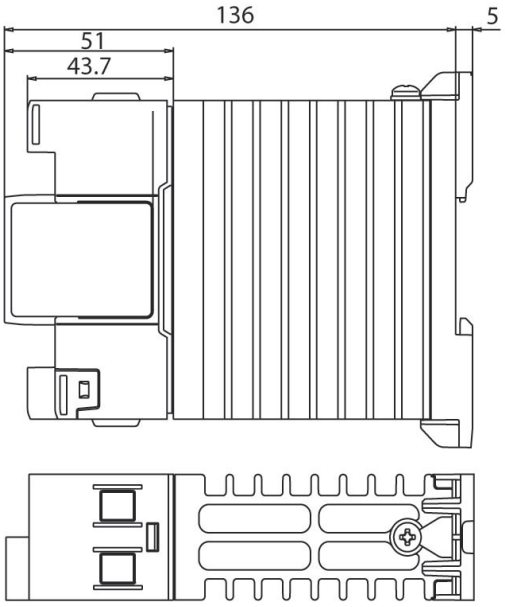

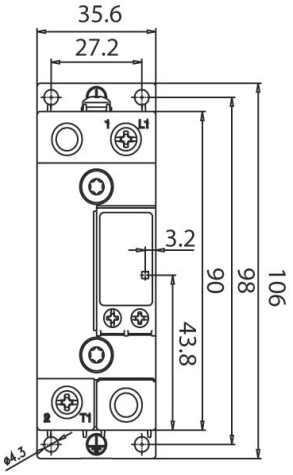

Published on 10 November 2026