


EI1808TBCPL6

Carlo Gavazzi Inductive Proximity Plastic Long M18 AC SCR NC
Output 8mm Sense plus 5m M12



NON-CONTACT SENSORS

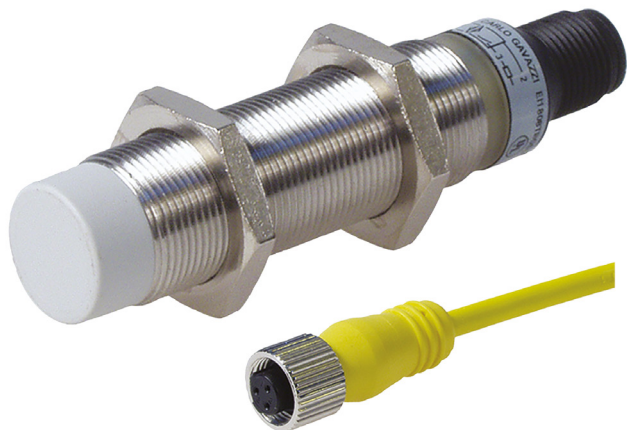

Component type	Inductive proximity switch
Range	Inductive Prox
Model	N/A
Alternative	NO ALTERNATIVE ITEM

The Carlo Gavazzi Inductive Proximity Sensors are a reliable and contactless solution in the detection of machinery and automation equipment. Available in a variety of styles and resistant to high level shock and vibration. Able to withstand wide temperature variations and voltage peaks of up to 200V making them ideal for high pressure and high temperature wash-down environments.

ELECTRICAL

Type of actuation	Metallic Target
Voltage type	AC
Type of switch function	Breaker contact
Switching frequency	25 Hz
Voltage drop (Ud)	8 V
Number of protected semiconductor outputs	1

COMMUNICATION

Type of interface	None
-------------------	------

CONSTRUCTION

Construction type housing	Cylinder, screw-thread
Material housing	Stainless steel
IP rating	IP67
Coating housing	Other
Cascadable	No
Compression-resistant	No
Suitable for safety functions	No

MECHANICAL

Mechanical mounting condition for sensor	Not flat
--	----------

DIMENSIONS

Diameter sensor	18 mm
Cable length	0 m
Weight (cable excluded)	20 g

ENVIRONMENT

Storage temperature	-30...80 °C
SIL according to IEC 61508	None

CERTIFICATES/APPROVALS

Explosion safety category for gas	None
Explosion safety category for dust	None