DINTMS802

NHP DIN-T Main Switch 2Pole 80A

DIN-T™
MINIATURE CIRCUIT BREAKERS



Component type	Miniature circuit breaker (MCB)
Range	MCB/RCD General Accessories
Model	N/A
Alternative	DTMSW280

NHP MCB/RCDs offer a wide range of high-quality accessories that are specifically designed to suit the NHP range.

ELECTRICAL	Rated current	80 A
	Number of poles (total)	2
	Rated voltage	415 V
	Frequency	50-60 Hz
	Voltage type	AC/DC
	Service voltage Ub, AC	12 V
	Rated impulse withstand voltage Uimp	8 kV
	Concurrently switching neutral conductor	Yes
CONSTRUCTION	IP rating	IP40
MECHANICAL	Connectable conductor cross section solid-core	1-50 mm²
DIMENSIONS	Height	86 mm
	Width	36 mm
	Depth	80 mm
	Width in number of modular spacings	2
	Weight	0.24 kg
ENVIRONMENT	Pollution degree	3
	Rated surrounding temperature without derating	30 °C
	Rated temperature	-5…40 °C

Published on 22 January 2026

DINTMS802

NHP DIN-T Main Switch 2Pole 80A

DIN-T™
MINIATURE CIRCUIT BREAKERS

DIMENSIONAL DIAGRAM

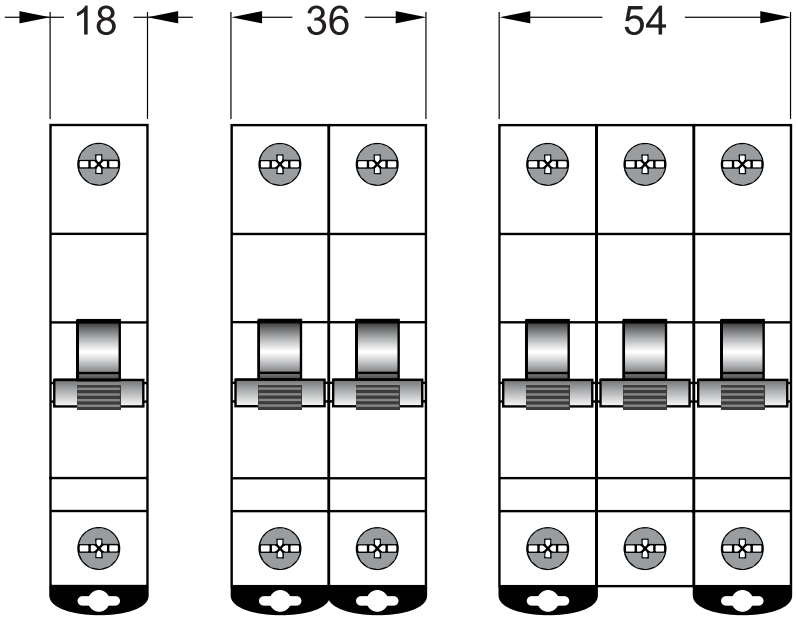

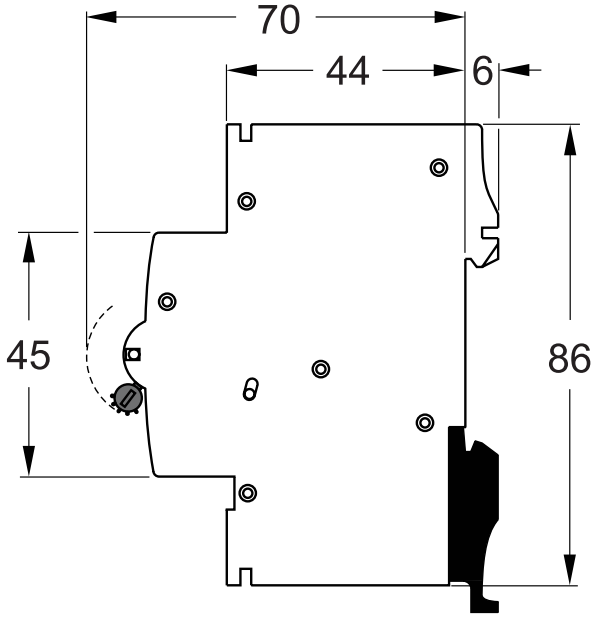

Published on 22 January 2026